

# MINIMAL TRACK

Reduced to the max!




# MINIMAL TRACK

Reduced to the max!



# IMAGINE MICRO


MINIATURIZED TECHNOLOGY

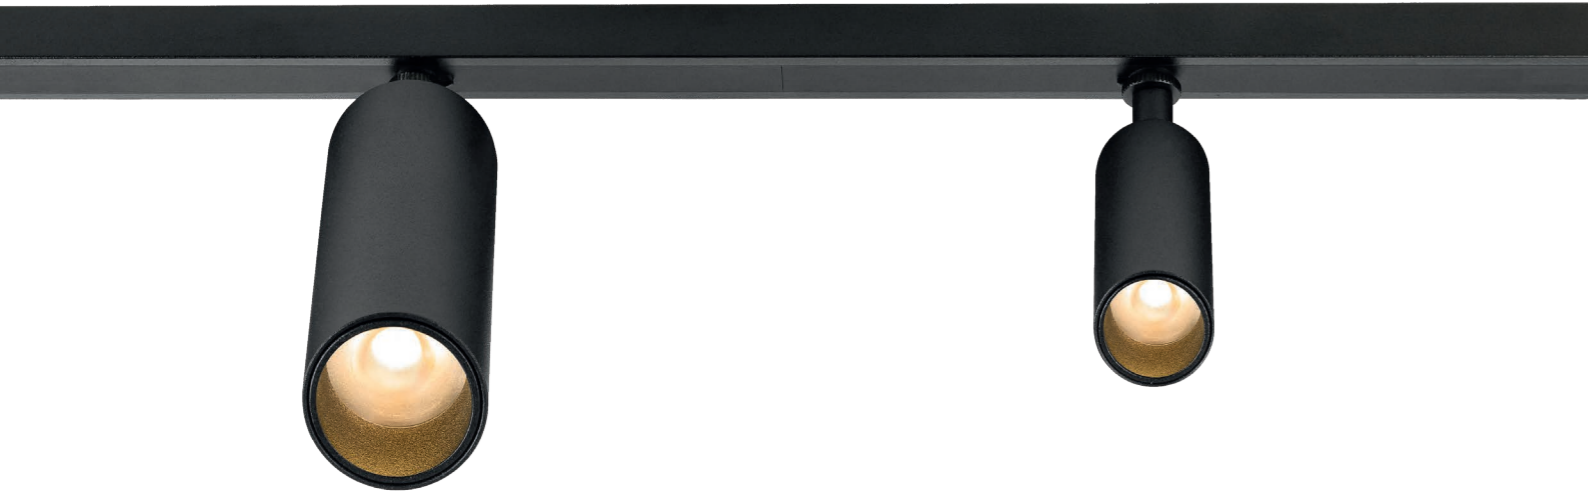

IMAGINE MICRO 35  
8.6W - up to 669lm

IMAGINE MICRO 20  
3.7W - up to 236lm

## YOUR PERFECT FOCUSING

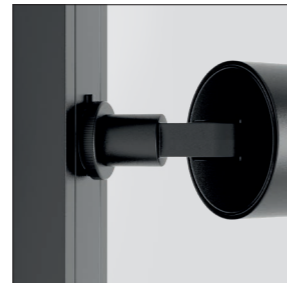


For the perfect definition of your light setting, not only each spot can be tilted from 0° to 90° and rotated 355°, but comes also equipped with a tool-less locking system, to fix in position the desired rotation, also when spots are installed in vertical track.



PHOTO | ARMIN KUPRIAN

## MINIMAL ESSENCE

Minimalistic design, minimal installation effort, tailor-made result in the most simple way.

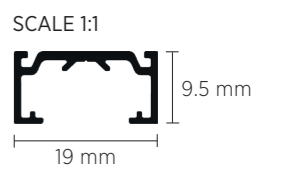



# PLUG & PLAY

## MINIMAL TRACK PLUG EXTENSION ACCESSORIES









Minimalistic design, minimal installation effort, tailor-made result in the most simple way - that's the MINIMAL TRACK system. Now it can be equipped with our well-known SNOOKER and HANGOVER inserts to give you even more possibilities to enrich your design concept.



- ① PLUG CONNECTOR  
coax cable 2 or 4m | 5 colors  
ART.-N° 800-1428
- ② PLUG CONNECTOR  
coax cable 10m | BLACK  
ART.-N° 800-1429
- ③ PLUG CONNECTOR  
coax cable 1.1m | BLACK  
ART.-N° 800-1434
- ④ CABLE LOOP  
wall-ceiling | 25 colors  
ART.-N° 350-2060
- ⑤ CABLE ROLLER  
wall-ceiling | 25 colors  
ART.-N° 350-2061
- ⑥ CABLE ROLLER  
25 colors  
ART.-N° 350-2063
- ⑦ SUSPENDED ROLLER  
25 colors  
ART.-N° 350-2064

VARIATIONS  
TAILOR MADE CREATIONS  
SPECIAL COLOR TEMPERATURE

# MINIMAL TRACK - PLUG & PLAY

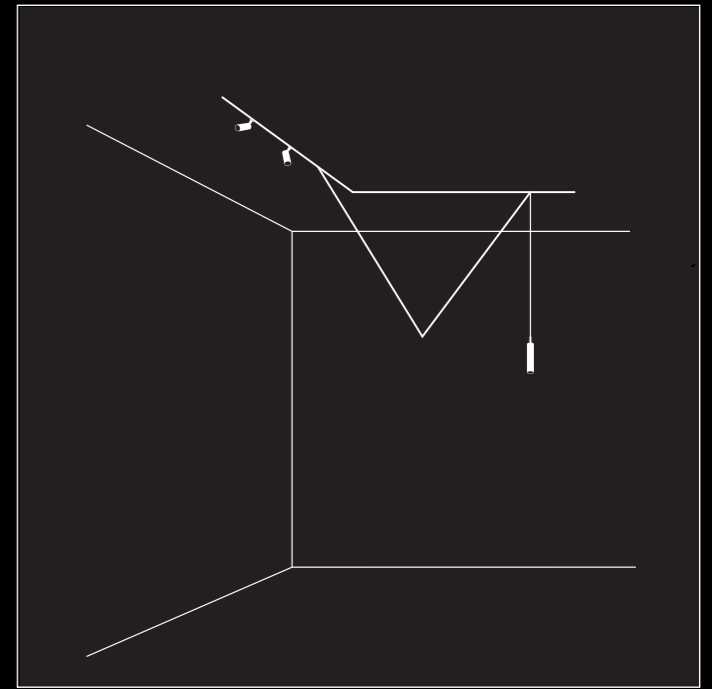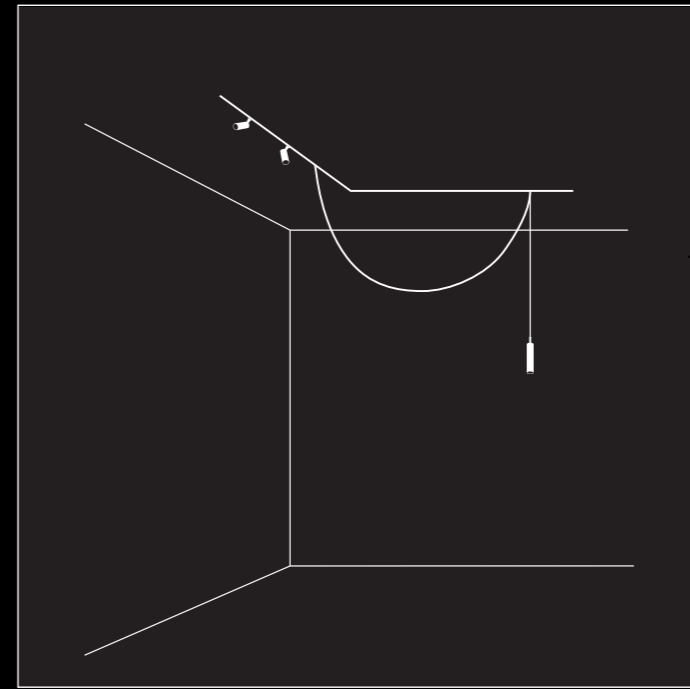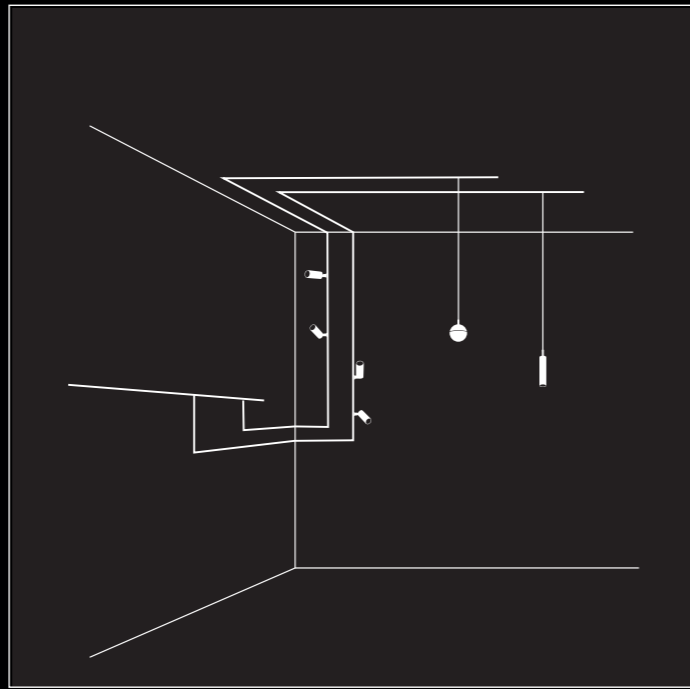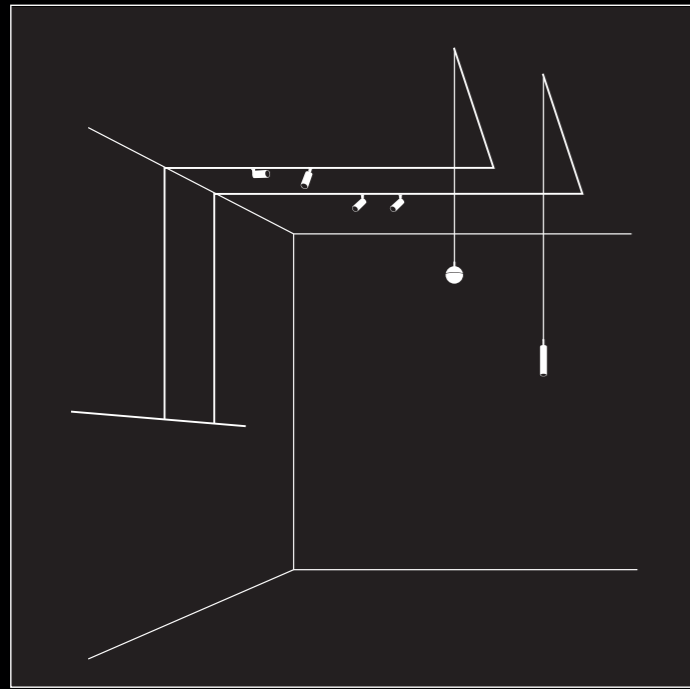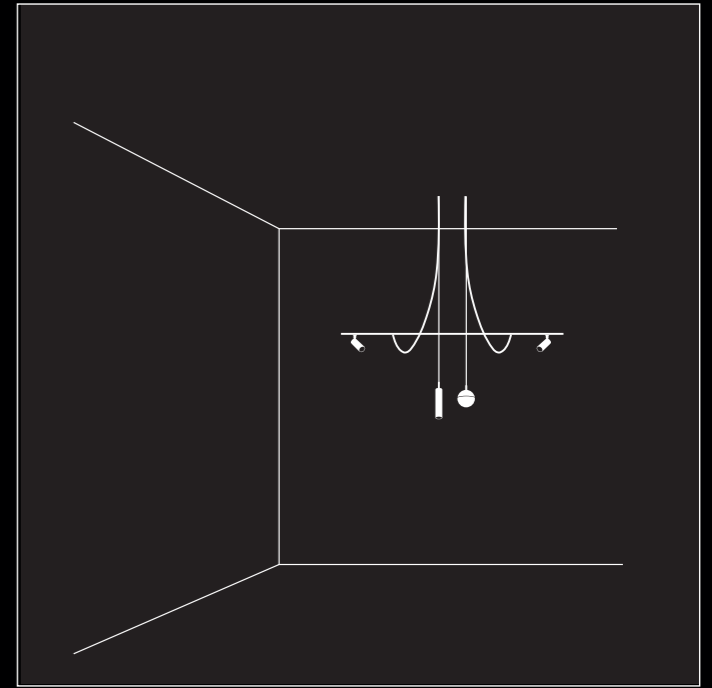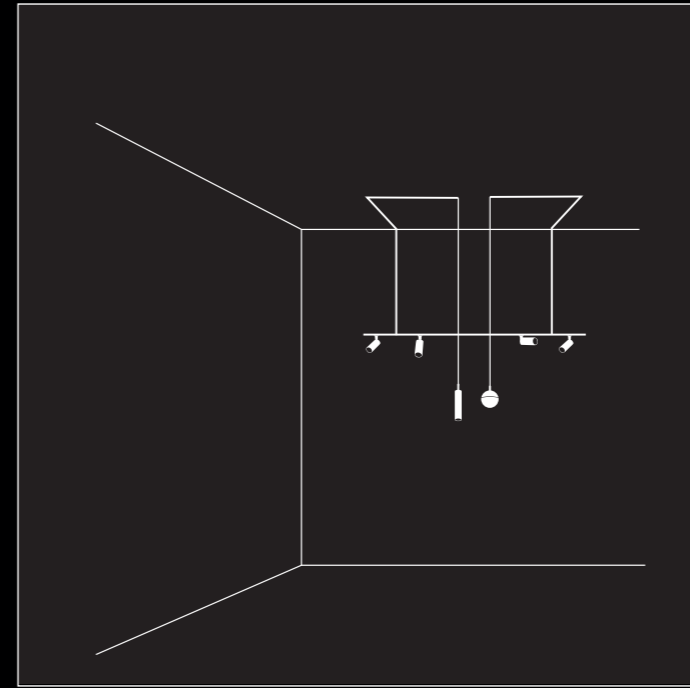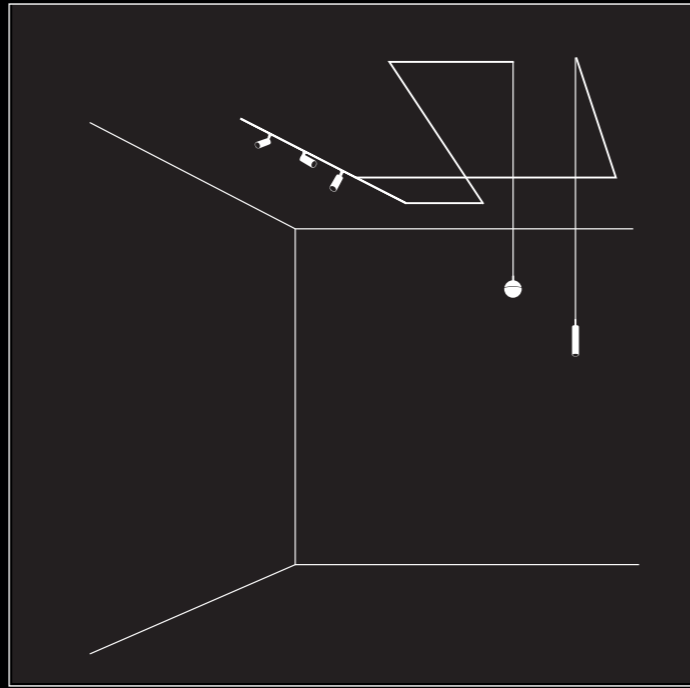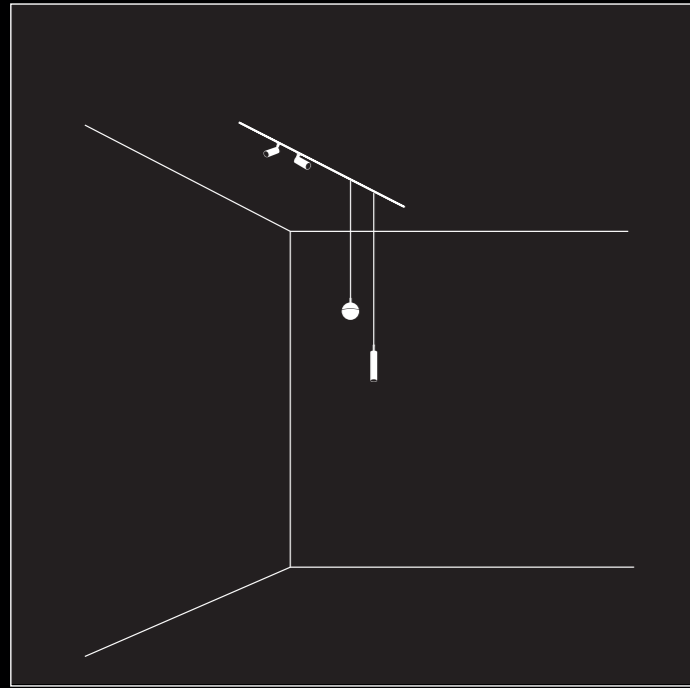

# DISQ ROUND

The DISQ ROUND is a new insert for the MINIMAL TRACK, offering a refined complement for the family. With its discrete 2700K indirect emission and its DALI DIM functionality, it offers maximum lighting comfort.


It is available in two different versions: with a DIBOND COVER, integrating an exclusive metal plate, which is available in copper, mirror or a stainless steel finish or in the COLOR version, which can be individualized in the 25 PROLICHT colors.

The DISQ inserts can also be equipped with the AURA COVER accessories - softening the light, highlighting the shape and creating a floating colored effect.

## DISQ ROUND



## DIBOND COVER

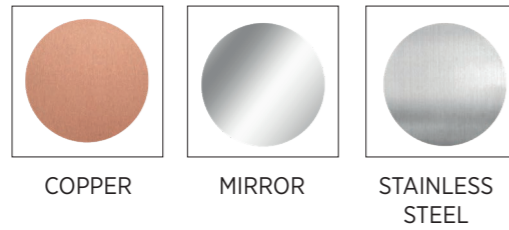

COPPER

MIRROR

STAINLESS  
STEEL

## DISQ ROUND COLOR




## POWDER COATED




RAL Classic

## CAN HAVE ACCESSORIES

### AURA COVER



YELLOW



ORANGE



RED



BLUE



GREEN







PHOTO | GUNTHER EGGER



INSPIRATION | BRANDSHOOT



PHOTO | ARMIN KUPRIAN

# DISQ SQUARE

The DISQ SQUARE is a new insert for the MINIMAL TRACK, offering a refined complement for the family. With its discrete 2700K indirect emission and its DALI DIM functionality, it offers maximum lighting comfort.


It is available in two different versions: with a DIBOND COVER, integrating an exclusive metal plate, which is available in copper, mirror or a stainless steel finish or in the COLOR version, which can be individualized in the 25 PROLICHT colors.

The DISQ inserts can also be equipped with the AURA COVER accessories - softening the light, highlighting the shape and creating a floating colored effect.

## DISQ SQUARE



## DIBOND COVER



COPPER




MIRROR



STAINLESS  
STEEL

## DISQ SQUARE COLOR




## POWDER COATED




RAL Classic

## CAN HAVE ACCESSORIES


### AURA COVER




YELLOW




ORANGE



RED



BLUE



GREEN





PHOTO | GUNTHER EGER

# MINIMALTRACK


## EASY INTEGRATION

### CONCRETE CEILING



You can choose an integrated feed connector for the most discrete installation with a remote driver or a compact surface mounted box, which is ideal for concrete ceilings and refurbishment applications, minimizing the impact on existing electrical wiring.

### EASY TO CUT ON SITE




The track is conceived to be easily cut on site, and directly screwed to the ceiling for a tailor-made result in each installation.

### CAN BE SCREWED DIRECTLY TO THE CEILING



The surface-mounted system is particularly easy to install on any wall or ceiling, while its ultra-slim design gives it the appearance of an embedded system.

### TRACKMASK




A black flexible rubber cover, easy to cut directly on site after positioning the inserts and integrated inside the track, is the final touch to furtherly minimize the appearance of the MINIMAL TRACK.




The MINIMAL TRACK allows you to simply design any line you want – available with 90° integrated connectors for elbows on the same surface or to jump ceiling to wall or T and X connectors with two different aesthetics to match various tastes in interior design. The track can be easily cut on site to perfectly fulfil any project requirements.

## ALL CURVES YOU CAN IMAGINE!


curved 45°




curved 90°




curved 180°

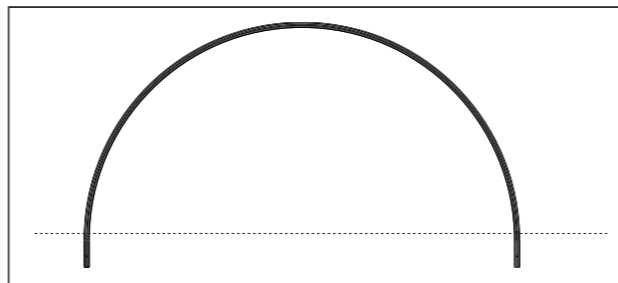


SPECIAL CURVES ON REQUEST

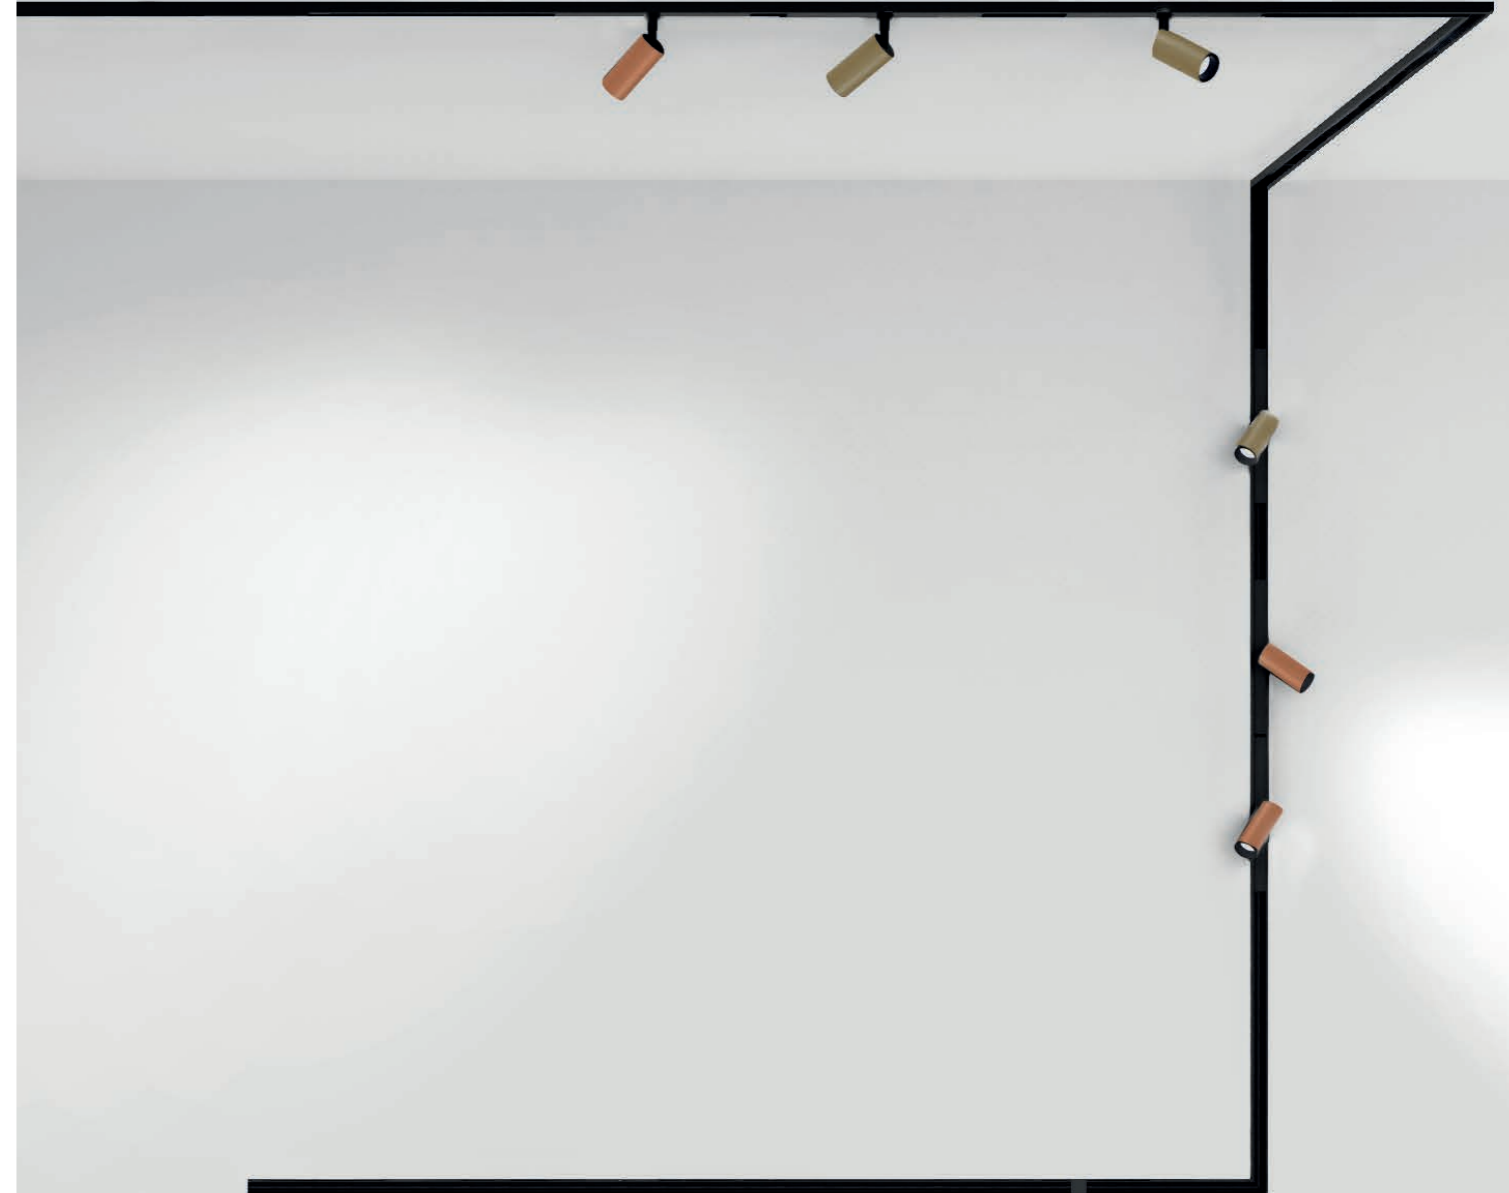

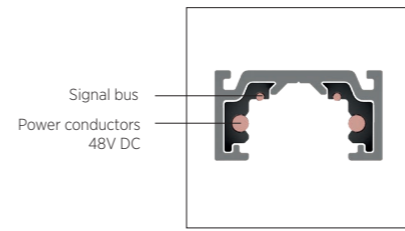

DALI offers individual control of each single luminaire, with the possibility of managing groups and scenarios.







The CASAMBI system allows wireless control of up to four groups of fittings through physical commands or a mobile Application.



The PUSH DIMM solution offers simple control of all the fittings in the same track and can be easily operated with a pushbutton.

### DALI DIM

Every moment, every day and every situation is different. The IMAGINE MICRO spots for the MINIMAL TRACK can be dimmed individually, in groups or together with DALI. This enables complete control of your lighting atmosphere. The PUSH DIMM solution offers simple control of all the fittings in the same track and can be easily operated with a pushbutton.

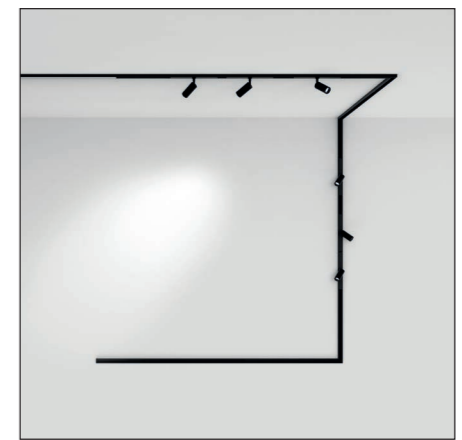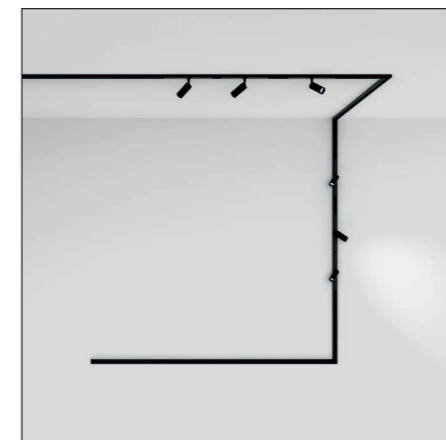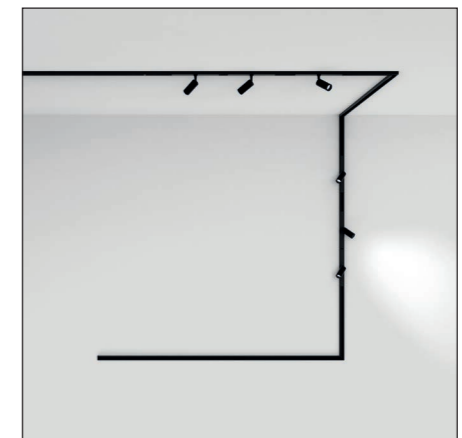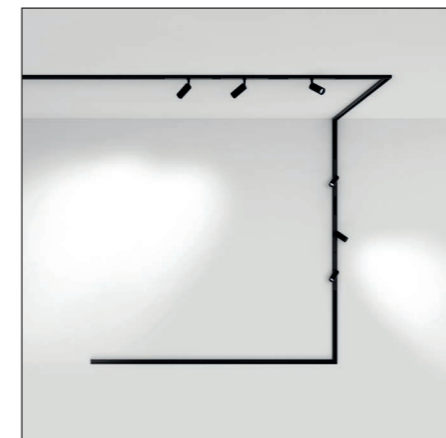





**MICRO LINE**  
available on request





# MINIMAL TRACK LIGHT

## IMAGINE MICRO 20

350 mA IP20		incl.		±90°		360°		48V DC		CE		A+	
DIMENSION MM	WATT MAX.	LUMEN MAX.	ART-N° DALI-DIM	1-29	TECHNIC OPTIONS	151		Ø23		50		ORDER EXAMPLE: CCT	
Ø23 H:50	3.7	310	7-02120-02	◆	CCT	27	30	40	22	33	black	4000	Spot
CCT		2700 K 3000 K 4000 K		BEAMWIDTH		S M		ORDER EXAMPLE: 7-02120-02		CCT		02 40 22	

## IMAGINE MICRO 35

350 mA IP20		incl.		±90°		360°		48V DC		CE		A	
DIMENSION MM	WATT MAX.	LUMEN MAX.	ART-N° DALI-DIM	1-29	TECHNIC OPTIONS	151		Ø35		76		ORDER EXAMPLE: CCT	
Ø35 H:76	8.6	669	7-02121-02	◆	CCT	27	30	40	22	33	black	2700	Medium
CCT		2700 K 3000 K 4000 K		BEAMWIDTH		S M		ORDER EXAMPLE: 7-02121-02		CCT		02 27 33	

BEAMWIDTH   LEGEND		
Super Spot	SS	0° - 10°
Spot	S	10° - 25°
Medium	M	25° - 35°
Flood	F	35° - 45°
Wide Flood	WF	45° - 55°
Very Wide Flood	VWF	55° - 65°

## DISQ ROUND

incl.		48V DC		CE		A+			
DIMENSION MM	WATT MAX.	LUMEN MAX.	ART-N° DALI-DIM	1-29	51 52 53		ORDER EXAMPLE: 7-02152-02		
Ø206 H:19	5.0	400	7-02152-02	□	DIBOND COVER	copper	stainless steel	mirror	
CCT		2700 K 3000 K 4000 K		BEAMWIDTH		S M		ORDER EXAMPLE: 7-02152-02 - 51	

## DISQ ROUND COLOR

incl.		48V DC		CE		A+			
DIMENSION MM	WATT MAX.	LUMEN MAX.	ART-N° DALI-DIM	1-29	51 52 53		ORDER EXAMPLE: 7-02153-02		
Ø206 H:19	5.0	400	7-02153-02	◆	DIBOND COVER	copper	stainless steel	mirror	
CCT		2700 K 3000 K 4000 K		BEAMWIDTH		S M		ORDER EXAMPLE: 7-02153-02 - 02	

## KANN-ZUBEHÖR > CAN-HAVE ACCESSORY

DIMENSION MM	ART-NO	1-5	ORDER EXAMPLE: 7-02153-02 - 02	
DISQ ROUND AURA COVER	800-1420Y	◆	black	
	800-14200	◆	black	
	800-1420R	◆	black	
	800-1420B	◆	black	
	800-1420G	◆	black	

## DISQ SQUARE

incl.		48V DC		CE		A+			
DIMENSION MM	WATT MAX.	LUMEN MAX.	ART-N° DALI-DIM	1-29	51 52 53		ORDER EXAMPLE: 7-02153-02 - 02 53		
216x216	5.0	400	7-02154-02	□	DIBOND COVER	copper	stainless steel	mirror	
CCT		2700 K 3000 K 4000 K		BEAMWIDTH		S M		ORDER EXAMPLE: 7-02153-02 - 02 53	

## DISQ SQUARE COLOR

incl.		48V DC		CE		A++			
DIMENSION MM	WATT MAX.	LUMEN MAX.	ART-N° DALI-DIM	1-29	51 52 53		ORDER EXAMPLE: 7-02153-02 - 02		
216x216	5.0	400	7-02155-02	◆	DIBOND COVER	copper	stainless steel	mirror	
CCT		2700 K 3000 K 4000 K		BEAMWIDTH		S M		ORDER EXAMPLE: 7-02153-02 - 02	

## KANN-ZUBEHÖR > CAN-HAVE ACCESSORY

DIMENSION MM	ART-NO	1-5	ORDER EXAMPLE: 7-02153-02 - 02	
DISQ SQUARE AURA COVER	800-1421Y	◆	black	
	800-14210	◆	black	
	800-1421R	◆	black	
	800-1421B	◆	black	
	800-1421G	◆	black	

## SNOOKER

DIMENSION MM		WATT MAX.	LUMEN MAX.	ART.-N°	1-29	TECHN. OPTIONS
Ø72		6.5	455	7-02232-02	◆	CCT

500 mA IP20 excl. 48V DC

CCT 27 30 40 2700 K 3000 K 4000 K

SHINERING X 00 01 02 03 04 05 06

BEAMWIDTH 33 66 M VWF

O. EXAMPLE: 7-02232-02 CCT 03 27 01 33 white ring medium white

## HANGOVER 30

DIMENSION MM		ART.-NO	1-29	TECHN. OPTIONS
L: 150		7-02233-02	◆ ▲	CCT
L: 300		7-02235-02	◆ ▲	CCT
L: 450		7-02237-02	◆ ▲	CCT

IP20 excl. 48V DC

CCT 27 30 40 2700 K 3000 K 4000 K

SHINERING X 00 01 02 03 04 05 06

BEAMWIDTH 22 33 66 S M VWF

O. EXAMPLE: 7-02233-02 CCT 03 04 27 01 33 white ring medium cream white

## HANGOVER 30 MICRO DOT

DIMENSION MM		ART.-NO	1-29	TECHN. OPTIONS
L: 150		7-02234-02	◆ ▲	CCT
L: 300		7-02236-02	◆ ▲	CCT
L: 450		7-02238-02	◆ ▲	CCT

CRI 90 IP20 incl. 48V DC

CCT 27 30 40 2700 K 3000 K 4000 K

BEAMWIDTH 33 66 M VWF

O. EXAMPLE: 7-02233-02 CCT 03 03 27 33 white ring medium white

## HANGOVER 40

DIMENSION MM		ART.-NO	1-29	TECHN. OPTIONS
L: 150		7-02239-02	◆ ▲	CCT
L: 300		7-02240-02	◆ ▲	CCT

CRI 90 IP20 incl. 48V DC

CCT 27 30 40 2700 K 3000 K 4000 K

BEAMWIDTH 44 55 F WF

SHINERING X 00 01 02 03 04 05 06

O. EXAMPLE: 7-02233-02 CCT 03 03 27 55 white ring wide flood white

BEAMWIDTH   LEGEND		
Super Spot	SS	0° - 10°
Spot	S	10° - 25°
Medium	M	25° - 35°
Flood	F	35° - 45°
Wide Flood	WF	45° - 55°
Very Wide Flood	VWF	55° - 65°

## KOMPONENTEN > COMPONENTS

DIMENSION MM		ART.-NO	1-29	TECHN. OPTIONS
PLUG-ADAPTER 2 / 4M PLUG-CONNECTOR 2 / 4M		800-1428	◆	T

















O. EXAMPLE: 800-1428-03 03 white 2000 mm










SUSP. CABLE COLOR+LENGTH 01 03 05 07 09 02 04 06 08 10 4000 2000















## KOMPONENTEN > COMPONENTS

PLUG-ADAPTER 10M SCHWARZ PLUG-CONNECTOR 10M BLACK	800-1429	◆	
PLUG-ADAPTER 1.1M BLACK PLUG-CONNECTOR 1.1M BLACK	800-1434	◆	
SCHIENENDIREKTABHÄNGER CABLE LOOP	350-2062	◆	
SCHIENEN-DIREKTABHÄNGER MIT KABELDEPOT CABLE ROLLER	350-2063	◆	
DECKE/WAND-DIREKTABHÄNGER WALL/CEILING CABLE LOOP	350-2060	◆	
DECKE/WAND-DIREKTABHÄNGER MIT KABELDEPOT WALL/CEILING CABLE ROLLER	350-2061	◆	
KABELDEPOT FÜR PENDELKOPF SUSPENDED ROLLER	350-2064	◆	






KOMPONENTEN > COMPONENTS		DIMENSION MM		ART.-NO	1-29		
	SCHIENE PULVER BESCHICKTET <i>TRACK POWDER COATED</i>	L: 1000 L: 2000 L: 3000		350-1885 350-1886 350-1887	◆		
	SCHIENENABDECKUNG KUNSTSTOFF SCHWARZ 5M <i>TRACKMASK BLACK 5M</i>			350-1896	BLACK		
	MONTAGESCHRAUBEN TRACK SET 50 STÜCK <i>MOUNTINGSCREWS TRACK SET 50 PIECES</i>			800-1427			
	ENDDECKEL SCHWARZ <i>ENDCAP BLACK</i>	W:19 H:11 L:8		350-1872	BLACK		
	90° SCHIENENPROFIL FÜR SCHNELLMONTAGE <i>90° DUMMY TRACK FOR QUICK INSTALLATION</i>	W:24 H:10 L:24		350-1876	BLACK		
	90° DECKE & WAND SCHIE- NENPROFIL FÜR SCHNELL- MONTAGE <i>90° DIHEDRAL DUMMY TRACK FOR QUICK INSTALLATION</i>	W:22 H:20 L:22		350-1877	BLACK		
	BOGEN $\varnothing = 800\text{MM} / 45^\circ$ <i>CURVED <math>\varnothing = 800\text{MM} / 45^\circ</math></i>			350-1893	◆		
	BOGEN $\varnothing = 1600\text{MM} / 45^\circ$ <i>CURVED <math>\varnothing = 1600\text{MM} / 45^\circ</math></i>			350-1894	◆		
	BOGEN $\varnothing = 400\text{MM} / 90^\circ$ <i>CURVED <math>\varnothing = 400\text{MM} / 90^\circ</math></i>			350-1892	◆		

KOMPONENTEN > COMPONENTS		DIMENSION MM		ART.-NO	1-29		
	BOGEN $\varnothing = 1600\text{MM} / 90^\circ$ <i>CURVED <math>\varnothing = 1600\text{MM} / 90^\circ</math></i>			350-1895	◆		
	BOGEN $\varnothing = 1600\text{MM} / 180^\circ$ <i>CURVED <math>\varnothing = 1600\text{MM} / 180^\circ</math></i>			350-1904	◆		
	X-VERBINDER <i>X-CONNECTOR</i>			350-1994	◆		
	T-VERBINDER <i>T-CONNECTOR</i>			350-1995	◆		
	LINEARVERBINDER SCHWARZ <i>LINEAR CONNECTOR BLACK</i>			350-1868	BLACK		
	HORIZONTALER ECKVERBINDER SCHWARZ <i>FLAT CORNER CONNECTOR BLACK</i>			350-1869	BLACK		
	DECKE-WAND VERBINDER SCHWARZ <i>DRIVER BOX FOR CENTRAL INSTALLATION CASAMBI</i>			350-1870	BLACK		
	FLEXIBLER VERBINDER SCHWARZ <i>FLEXIBLE CONNECTOR BLACK</i>			350-1871	BLACK		


KOMPONENTEN > COMPONENTS		DIMENSION MM	ART.-NO	1-29	
	ENDEINSPEISUNG SCHWARZ INKL. 2.5 M ZULEITUNG <i>FEED UNIT CENTRAL BLACK 2.5 M SUPPLY CABLE INCL.</i>	L1:71 L2:141	350-1866	BLACK	
	MITTENEINSPEISUNG SCHWARZ INKL. 2.5 M ZULEITUNG <i>FEED UNIT CENTRAL BLACK 2.5 M SUPPLY CABLE INCL.</i>	W:77 L:116	350-1867	BLACK	
	TREIBERBOX o/o ENDEINSPEISUNG <i>DRIVER BOX ENDINSTALLATION</i>	W:75 H:36 L:240 <i>max. 96 Watt</i>	350-1873	◆	
	TREIBERBOX DALI ENDEINSPEISUNG <i>DRIVER BOX DALI ENDINSTALLATION</i>	W:120 H:36 L:240 <i>max. 86 Watt</i>	350-1996	◆	
	TREIBERBOX PUSHDIM ENDEINSPEISUNG <i>DRIVER BOX PUSHDIM ENDINSTALLATION</i>	W:120 H:36 L:240 <i>max. 92 Watt</i>	350-1898	◆	
	TREIBERBOX CASAMBI ENDEINSPEISUNG <i>DRIVER BOX CASAMBI ENDINSTALLATION</i>	W:120 H:36 L:240 <i>max. 86 Watt</i>	350-1899	◆	
	TREIBERBOX o/o MITTENEINSPEISUNG <i>DRIVER BOX FOR CENTRAL INSTALLATION</i>	W:75 H:36 L:240 <i>max. 96 Watt</i>	350-1874	◆	

KOMPONENTEN > COMPONENTS		DIMENSION MM	MM <sup>2</sup>	ART.-NO	1-29	
	TREIBERBOX DALI MITTENEINSPEISUNG <i>DRIVER BOX DALI FOR CENTRAL INSTALLATION</i>	W:120 H:36 L:240 <i>max. 86 Watt</i>		350-1997	◆	
	TREIBERBOX PUSHDIM MITTENEINSPEISUNG <i>DRIVER BOX PUSHDIM FOR CENTRAL INSTALLATION</i>	W:120 H:36 L:240 <i>max. 92 Watt</i>		350-1900	◆	
	TREIBERBOX CASAMBI MITTENEINSPEISUNG <i>DRIVER BOX CASAMBI FOR CENTRAL INSTALLATION</i>	W:120 H:36 L:240 <i>max. 86 Watt</i>		350-1901	◆	
	NETZTEIL 48V <i>POWER SUPPLY 48V max. 96 Watt</i>	W:28.5 H:20 L:252		350-1875		
	DECKENEINBAUSET PUSHDIM <i>REMOTE SET PUSHDIM max. 92 Watt</i>	W:27 H:20 L:252	W:44 H:23 L:90	350-1905		
	DECKENEINBAUSET CASAMBI <i>REMOTE SET CASAMBI max. 86 Watt</i>	W:27 H:20 L:252	W:42 H:25 L:164	350-1906		
	DECKENEINBAUSET DALI <i>REMOTE SET DALI max. 86 Watt</i>	W:27 H:20 L:252	W:42 H:25 L:164	350-1998		

# MAKE IT YOURS!

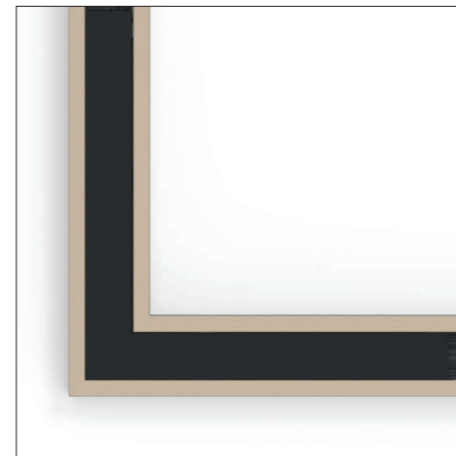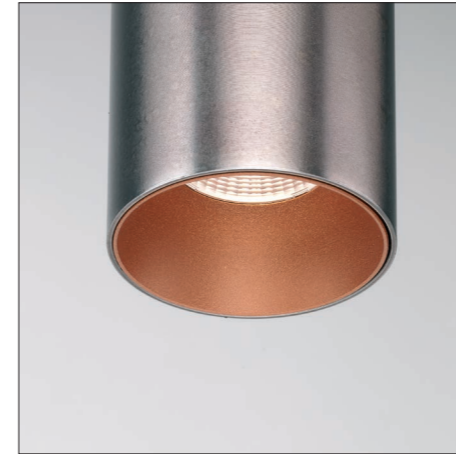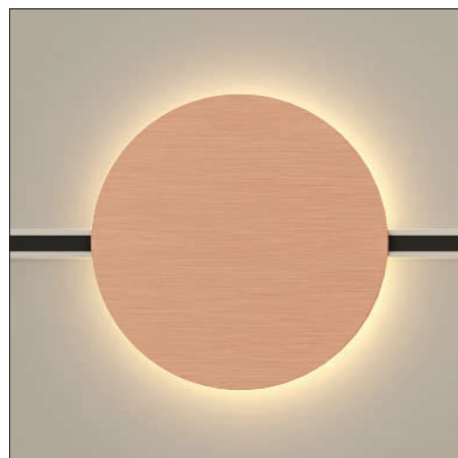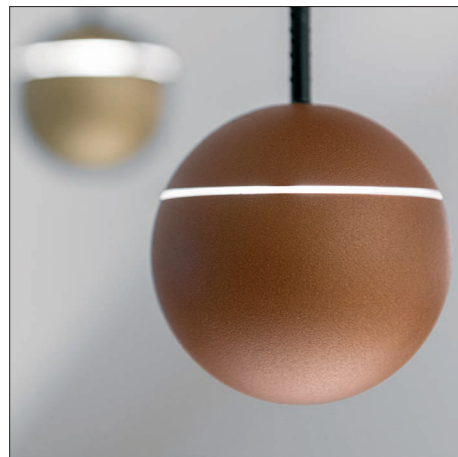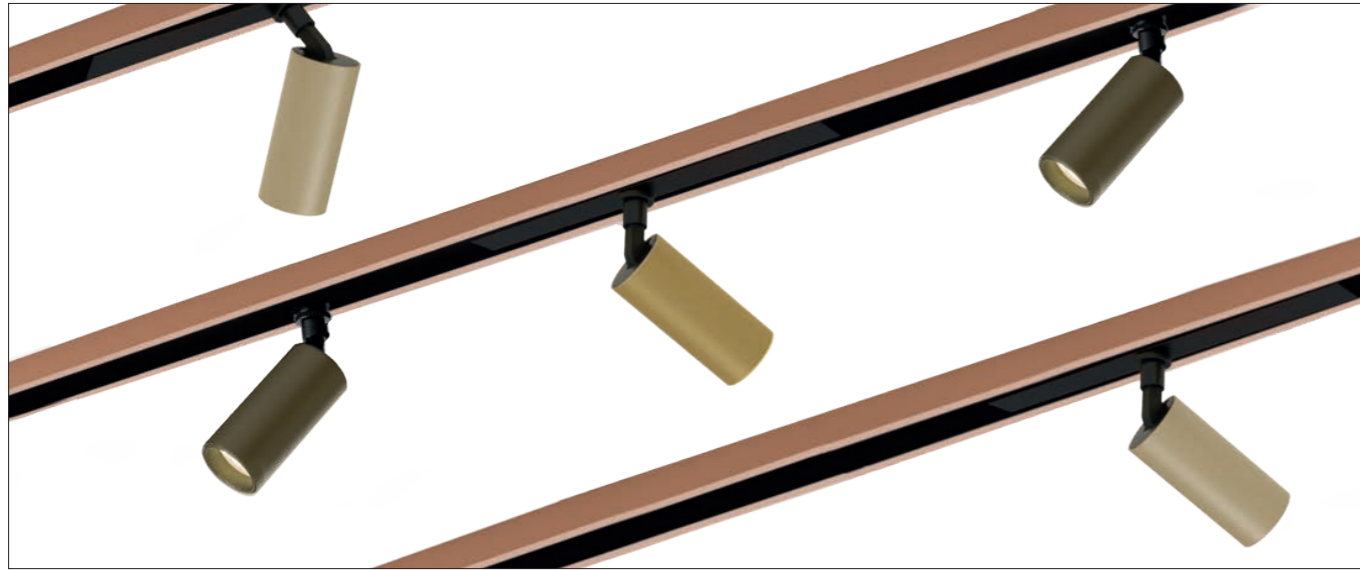

## COLOR

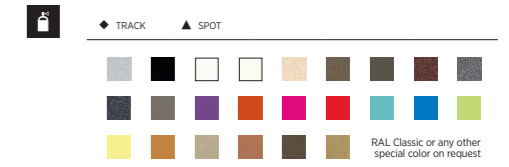

## OPTICS

CCT	COLOR TEMPERATURE	2700 K
		3000 K
		4000 K
CONTROL		CASAMBI
		PUSH DIM
		DALI

## SHAPE

DIMENSION	TRACK	
	1000 mm	2000 mm
		3000 mm
		IMAGINE MICRO
		Ø 35
		Ø 23
		DISQ COLOR ROUND
		Ø 206
		DISQ COLOR SQUARE
		216x216 mm
		SNOOKER
		Ø 72
		HANGOVER 30
	150 mm	300 mm
		450 mm
		HANGOVER 40
		300 mm
		450 mm

## ON REQUEST

ADDITIONAL OPTIONS	SPECIAL COLOR TEMPERATURE
	SPECIAL CONTROL OPTIONS
	SPECIAL CURVES

## MAKE IT YOURS!

CONFIGURE ONLINE:  
PROLICHT.AT/MINIMAL TRACK





Based on the MINIMAL TRACK system, as result of PROLICHT cooperation with Tom Dixon we designed CODE: a product that merges technological expertise with a unique design vision, an innovation that could only be created together.

DISCOVER MORE ON

[www.prolicht.at/code](http://www.prolicht.at/code)

N 47.142627°  
E 11.324450°  
OUR HOMEBASE  
IN THE ALPS.



EDITOR Filippo Bettinzoli, PROLICHT  
PROLICHT GmbH | Austria  
6091 Neu-Götzens | Gewerbestraße 9  
T +43 5234 33 499 | F + 43 5234 33 499 22  
marketing@prolicht.at | www.prolicht.at

TECHNICAL SUPPORT Romain Hoffmann

GRAPHIC DESIGN Tonia Wiedenmann

TEXT Julia Kopp, Philipp Juen

PRODUCT RENDERINGS viewture.media, brandshoot

EDITION may 2021

ARTICLE NUMBER PDF



FOLLOW US ON  
INSTAGRAM

[WWW.PROLICHT.AT](http://WWW.PROLICHT.AT)