



2LOOK4 50
SIMPLY ELEGANT

2LOOK4 50 CATALOGUE 2022

ENGLISH

All technical information and values (e.g. lumen, output, beam angle or dimensions) correspond to the printing date or the creation date of this document and will not necessarily be updated.
All changes and adaptations that serve to improve our products can be carried out without prior notice.

The latest data sheets can be configured at www.prolicht.at







YOUR PROJECT
MAKES YOUR PRODUCT



MECHANICAL CONNECTION




TRACK POWER FEED CONNECTION




CUTABLE BLACK PLASTIC COVER



3-TRACK NECESSARY (CHAPTER: ACCESSORY)



A: Opening width | B: Recess depth
C: Opening depth | D: Profile height
E: Width including mounting brackets







CENTRIQ IN





POWER

9 - 37 WATT


IP International Protection

IP20

INSTALLATION

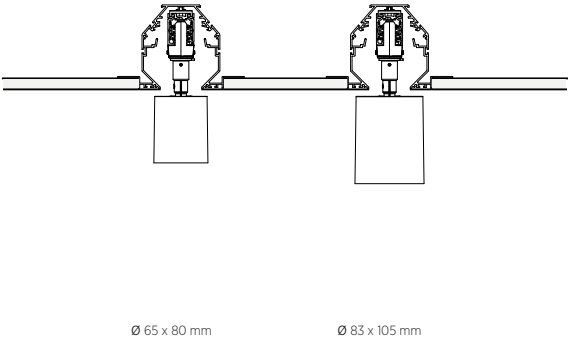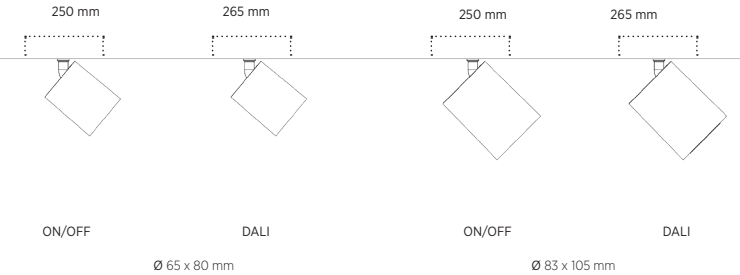

COLOR TEMPERATURE CCT

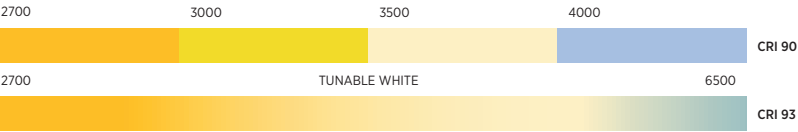

BEAMWIDTH



COLOR ADAPTER




COLOR


25 PROLICHT COLORS




RAL Classic or any other special color on request



CENTRIQ IN 65




CENTRIQ IN 65 | SUPERSPOT




CENTRIQ IN 65 | FLEX


Ø 65 x 80 mm



CENTRIQ IN 83



CENTRIQ IN 83 | SUPERSPOT



CENTRIQ IN 83 | FLEX

Ø 83 x 105 mm

CENTRIQ IN 65

VERSION	CCT				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE				ART-N° ON/OFF	ART-N° DALI
	2700	3000	3500	4000	2291	23	90	IP20	SPOT 24°	FLOOD 36°	WIDE FLOOD 52°		7-02388-00	7-02389-02
SUPERSPOT	2700	3000	3500	4000	1554	21	90	IP20	SUPERSPOT 12°				7-02392-00	7-02393-02
FLEX	2700	3000	3500	4000	1421	21	90	IP20	SPOT 14° - WIDE FLOOD 44°				7-02390-00	7-02391-02
	TUNABLE WHITE 2700 - 6500				1269	15	92	IP20	SPOT 18°	MEDIUM 34°	WIDE FLOOD 54°	●		7-02750-02
SUPERSPOT TW	TUNABLE WHITE 2700 - 6500				564	9	92	IP20	SUPERSPOT 12°				●	7-02751-02

CENTRIQ IN 85

VERSION	CCT				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE				ART-N° ON/OFF	ART-N° DALI
FLEX	2700	3000	3500	4000	1421	21	90	IP20	SPOT 14° - WIDE FLOOD 44°				7-02396-00	7-02397-02
	TUNABLE WHITE 2700 - 6500				2907	36	93	IP20	SPOT 24°	MEDIUM 34°	WIDE FLOOD 54°	●		7-02752-02
SUPERSPOT	TUNABLE WHITE 2700 - 6500				569	9	92	IP20	SUPERSPOT 10°				●	7-02754-02
FLEX	TUNABLE WHITE 2700 - 6500				479	9	92	IP20	SPOT 14° - WIDE FLOOD 46°				●	7-02753-02
HIGH OUTPUT	2700	3000	3500	4000	4312	41	90	IP20	SPOT 24°	FLOOD 36°	WIDE FLOOD 54°	7-02765-00		7-02765-02

POSSIBLE CONTROLS

ON/OFF





OIKO PRO IN


POWER

15 - 21 WATT


IP International Protection

IP20

INSTALLATION

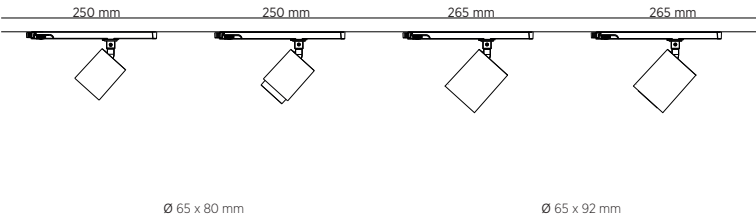

COLOR TEMPERATURE CCT



BEAMWIDTH

WALLWASH



SPOT
15°



MEDIUM
34°



WIDE FLOOD
52°



VERY WIDE FLOOD
68°




COLOR


25 PROLICHT COLORS



RAL Classic or any other special color on request

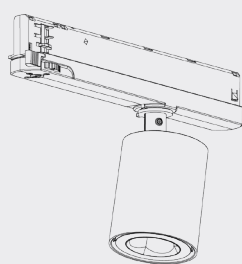

TRACK
Ø 65 mm x 80 mm

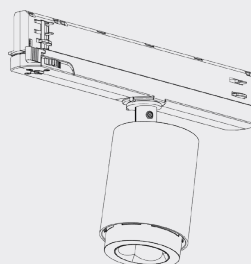

TRACK
Ø 65 mm x 92 mm

OIKO PRO IN

VERSION	CCT				LUMEN MAX.	WATT	CRI	IP	BEAM ANGLE		ART.-N° STANDARD	ART.-N° DALI
	2700	3000	3500	4000	1724	20	90	IP20	WALLWASH		7-02761-00	7-02761-02
	2700	3000	3500	4000	1461	21	90	IP20	SPOT	14°	7-02763-00	7-02763-02
	2700	3000	3500	4000	1603	20	90	IP20	MEDIUM	34°	7-02755-00	7-02755-02
	2700	3000	3500	4000	1759	21	90	IP20	WIDE FLOOD	50°	7-02757-00	7-02757-02
	2700	3000	3500	4000	1932	20	90	IP20	VERY WIDE FLOOD	60°	7-02759-00	7-02759-02
	TUNABLE WHITE 2700- 6500				1213	15	90	IP20	WALLWASH		●	7-02762-02
	TUNABLE WHITE 2700 - 6500				1240	15	90	IP20	FLOOD	36°	●	7-02756-02
	TUNABLE WHITE 2700 - 6500				1070	15	90	IP20	WIDE FLOOD	50°	●	7-02758-02
	TUNABLE WHITE 2700 - 6500				1381	15	90	IP20	VERY WIDE FLOOD	62°	●	7-02760-02

POSSIBLE CONTROLS

ON/OFF  CAS  MBI PUSH DIM 1-10V





MAGIQ PLUS WALLWASH


POWER

46 WATT

IP International Protection

IP20

INSTALLATION

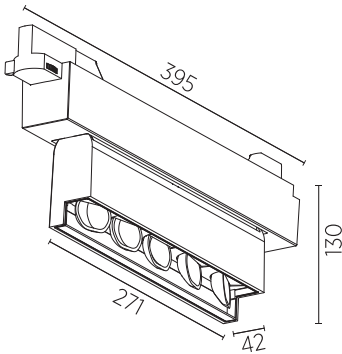

COLOR TEMPERATURE CCT



BEAMWIDTH

WALLWASH




COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request



TRACK

395 x 50 mm | H: 130 mm

MAGIQ PLUS WALLWASH

VERSION	CCT				LUMEN MAX.	WATT	CRI	IP	ART.-N° ON/OFF	ART.-N° DALI
	2700	3000	3500	4000	3151	46	90	IP20	330-0750	330-0752

POSSIBLE CONTROLS

ON/OFF



2LOOK4 50 | COMPONENTS

ARTICLE	DESCRIPTION	DIMENSION mm	COLOR	ART.-N°
	Hx0 FEED 7x1,5mm ² L= 2000mm	Ø 12 H: 2000	1-29	100-617
	ALUMINIUM-PROFILE per meter	1000 x 50 H: 101	1-29	140-0203
	3-TRACK	1000 x 32 H: 38	BLACK	11-00904
		2000 x 32 H: 38		11-00905
		3000 x 32 H: 38		11-00906
	CAP PROFILE	1000 x 64 H: 14	BLACK	140-0201
	END CAP	1 x 94 H: 101	BLACK	140-0202
	LINEAR COUPLER	85 x 80 H: 5		140-0204
	SPACER	32 x 32 H: 11		140-0209
	PROLICHT 3 - STANDARD ADAPTER inc. strain relief		BLACK	800-1301
	PROLICHT 3 - DALI ADAPTER inc. strain relief		BLACK	800-1304
	LINEAR CONNECTOR		BLACK	11-00965



PHOTO | ARMIN KUPRIAN

OIKO PRO IN & CENTRIQ IN + TRACK | COLOR 02 BLACK VELVET

WWW.PROLICHT.AT

CONFIGURATION MAKES A DIFFERENCE

Luminaires play an important role in your room design, which means that you need to have unlimited configurability. And that's what we at PROLICHT can give you. With all our lighting solutions.

Try it out and see for yourself what it means to create your own, tailor-made product from millions of possible combinations - with the help of our unique 3D configurator.



MAKE IT YOURS!

CONFIGURE ONLINE:

WWW.PROLICHT.AT/2LOOK4







RAL Classic or any other special color on request



DISCOVER MORE ON
WWW.PROLICHT.AT/2LOOK



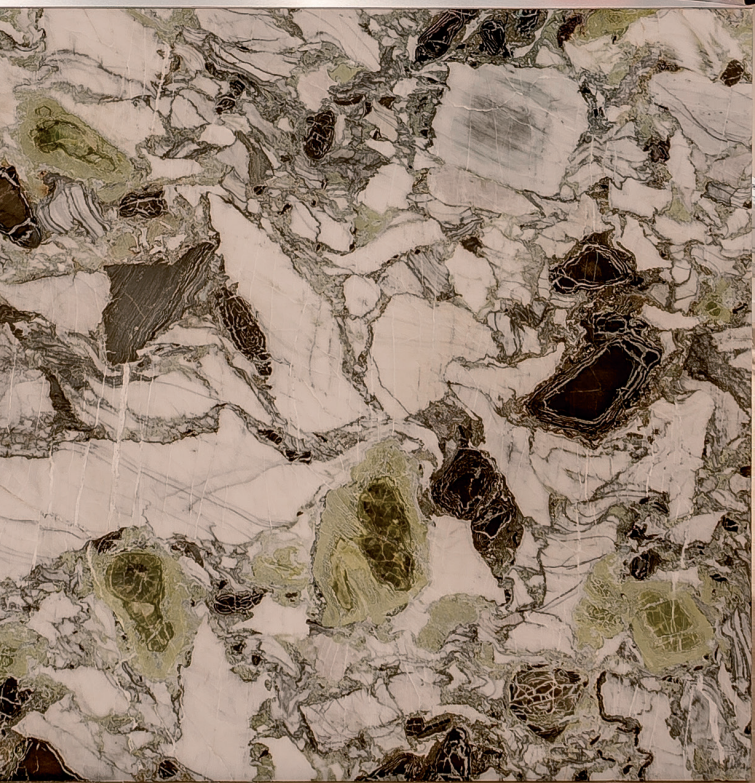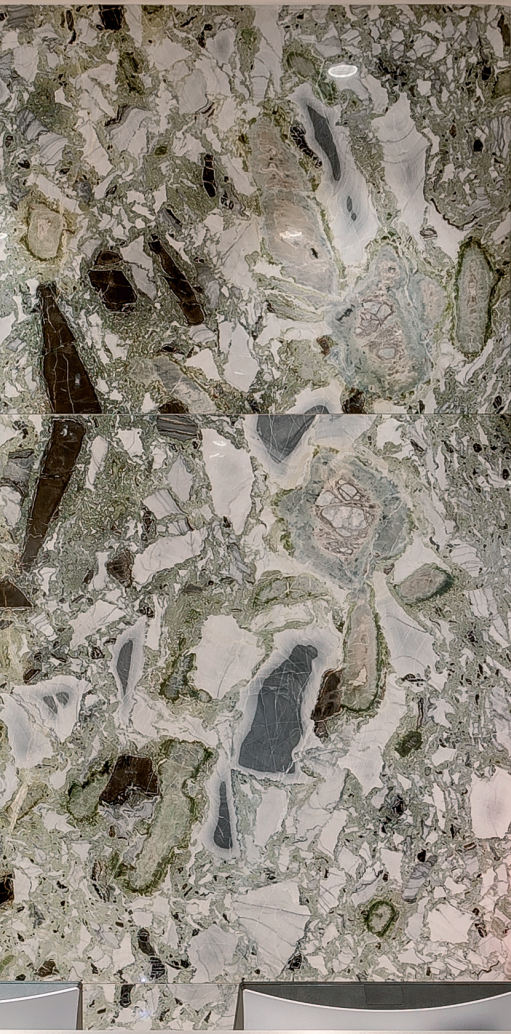



EDITOR	Filippo Bettinzoli, PROLICHT PROLICHT GmbH Austria 6091 Neu-Götzens Gewerbepark 9 T +43 5234 33 499 F + 43 5234 33 499 22 marketing@prolicht.at www.prolicht.at
TECHNICAL SUPPORT	Romain Hoffmann
GRAPHIC DESIGN	Tonia Wiedenmann
TEXT	Julia Kopp
PRODUCT PHOTOS	Armin Kuprian
PRODUCT RENDERINGS	Aurel Petic, viewture.media, MOZING STUDIO
EDITION	Autumn 2022



FOLLOW US ON
INSTAGRAM

WWW.PROLICHT.AT