




MINIMAL TRACK CATALOGUE 2022 ENGLISH


All technical information and values (e.g. lumen, output, beam angle or dimensions) correspond to the printing date or the creation date of this document and will not necessarily be updated!
All changes and adaptations that serve to improve our products can be carried out without prior notice!

The latest data sheets can be configured at www.prolicht.at!

# VERSATILE AND ALMOST INVISIBLE

The innovative MINIMAL TRACK lighting system combines pure minimalism with the latest technology. Its ultra-compact design makes the sophisticated technology almost invisible, leaving only elegant lines that integrate perfectly into the interior design.

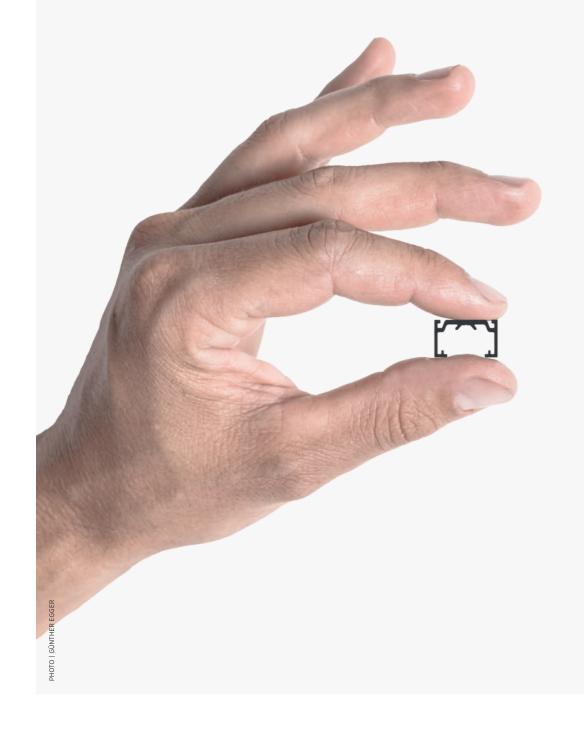


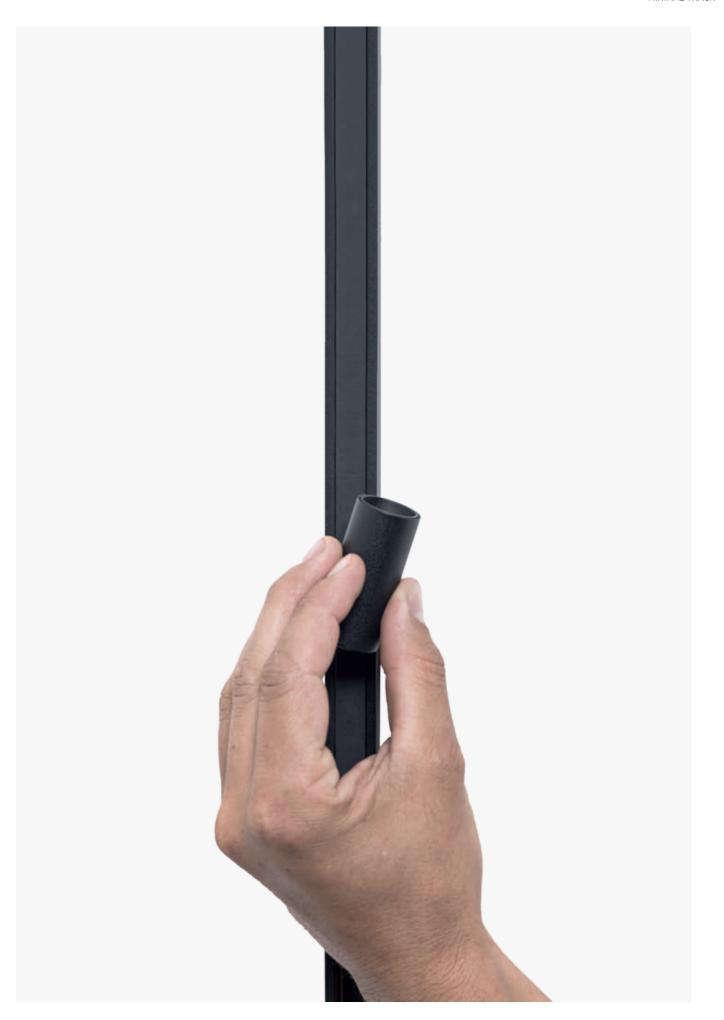





TRACK	INSERTS	S	PRODUC	CT LIST
12-17	TECHNICAL OVERVIEW 26-35	OVERVIEW	102-115	MINIMAL TRACK
18-21	CONNECTORS TRACK 36-41	IMAGINE MICRO		
22-25	CURVED TRACK 42-43	MAGIQ MICRO		
	44-45	MICRO LINE		
	46-51	DISQ ROUND & SQUARE		
	52-61	SNOOKER		
	62-69	HANGOVER		
	70-77	MELT		
	78-81	OPAL		
	82-93	PLUG ACCESSORIES		
	94-97	CONTROL		
	98-101	CONFIGURATION		

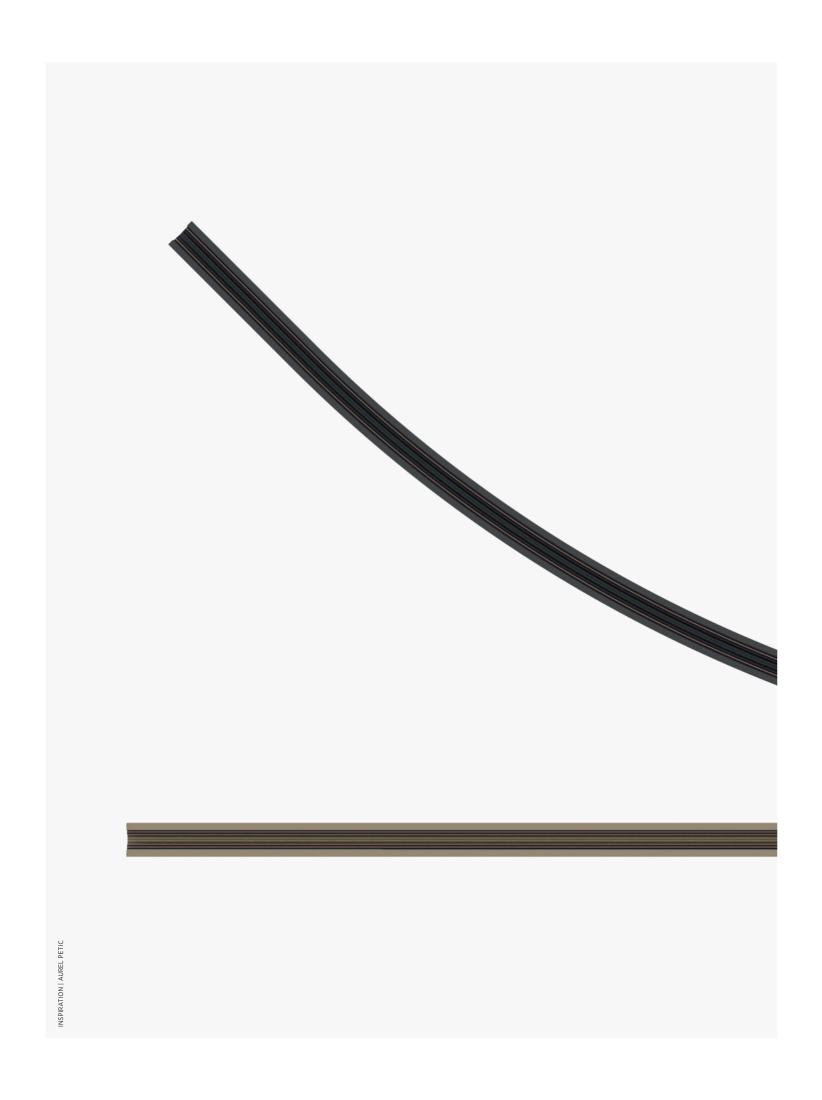

# MINIMAL TRACK

#### MINIMAL ESSENCE

Minimalistic design, minimal installation effort, tailor-made result in the most simple way.

The MINIMAL TRACK allows you to simply design any line you want – available with 90° integrated connectors for elbows on the same surface or to jump ceiling to wall or T- and X-connectors with two different aesthetics to match various tastes in interior design. The track can be easily cut on site to perfectly fulfil any project requirements.



#### **COLOR MAKES A DIFFERENCE**

Unique colors and finishes, with infinite combinations, enable a holistic interior design concept to be completed or certain highlights to be created with our 25 PROLICHT colors. RAL Classic or any other special color is available on request.
































SCALE 1:1



### **EASY INTEGRATION**


#### TRACK MOUNTING



TRACK MOUNTING The track is conceived to be easily cut on site, and directly screwed to the ceiling for a tailor-made result in each installation.


Article-Number for a set of 50 pieces of mounting screws: 800-1427

#### CROSSINGS




CROSSINGS Complex connection pieces belong to the past with MINIMAL TRACK. The linear elements can be used to create crossings in the easiest way. Even after the installation, adaptions can be made with minimal effort.

#### **ELECTRICAL CONNECTION**




ELECTRICAL CONNECTION Every T-Connector is enclosed with one, every X connector with two flexible cross adapters. An electrical connection of the pieces can be established with these components with ease.

#### COVERING THE CROSSINGS



COVERING THE CROSSINGS Whether as a colorful accent in the PROLICHT colors or synchronized with the color of the track, the covers are placed as a final step.

#### INSERTS




INSERTS Place and remove any insert wherever you want by simply pulling it out and snapping it in without any tools needed.

### TRACKMASK



TRACKMASK A black flexible rubber cover, easy to cut directly on site after positioning the inserts and integrated inside the track, is the final touch to furtherly minimize the appearance of the MINIMAL TRACK.

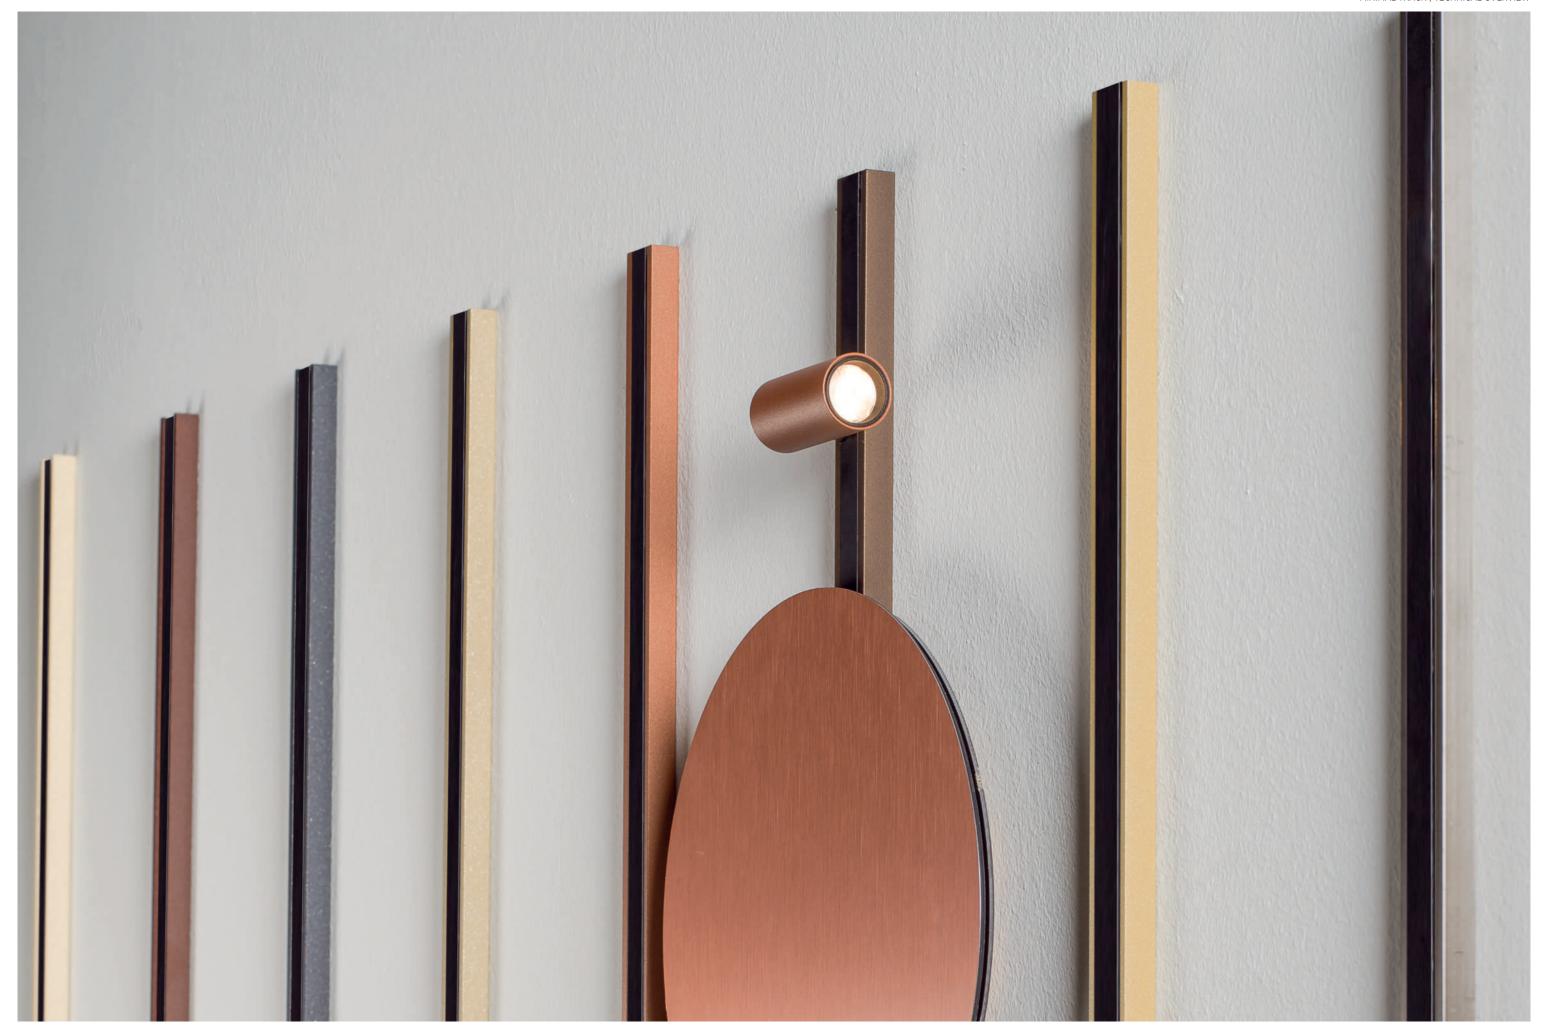

# STRAIGHT LINES

LINEAR CONNECTOR

COLOR: BLACK ART.-N°: 350-1868

FLAT CORNER CONNECTOR

COLOR: BLACK ART.-N°: 350-1869

DIHEDRAL CONNECTOR

COLOR: BLACK ART.-N°: 350-1870

90° DUMMY TRACK
QUICK INSTALLATION

COLOR: BLACK ART.-N°: 350-1876

90° DIHEDRAL DUMMY TRACK QUICK INSTALLATION

> COLOR: BLACK ART.-N°: 350-1877

ENDCAP TRACK

COLOR: BLACK ART.-N°: 350-1872


**G** X-CONNECTOR

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1994

T-CONNECTOR

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1995



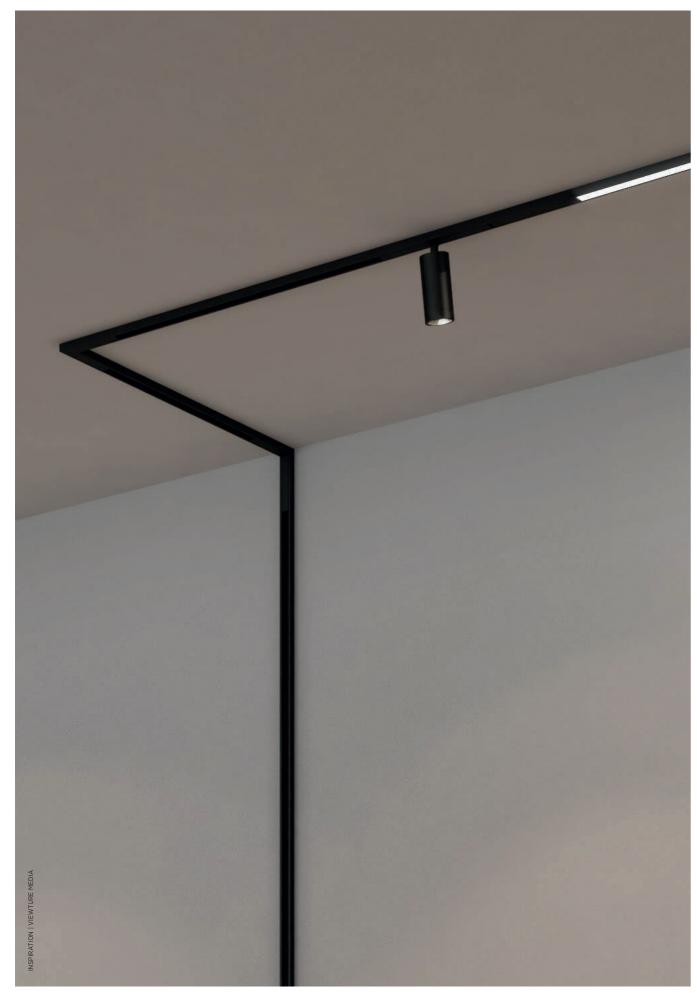

IMAGINE MICRO | COLOR 02 BLACK VELVET | MICRO LINE



QUICK CONNECTOR

To guarantee a quick and easy installation, we offer additional track components. This black connector is especially suited to facilitate the installation of the MINIMAL TRACK.



**Q** QUICK CONNECTOR WALL TO CEILING



MITER JOINT

The track is designed to be easily cut on site and for a seamless installation of corner elements it is possible to cut the extremities of straight elements at an angle of 45° for a miter-joint connection. If other angles are needed - for a sloping roof for example - the joint can be individualized with a flexible connector.



**B** MITER JOINT WALL TO CEILING

# YOUR PERFECT CURVE!

The MINIMAL TRACK offers many solutions to compose curved profiles, with 45, 90° and 180° curved connectors. Individualized solutions can be evaluated on request.

All of the curved elements are available in the 25 PROLICHT colors.

CURVED CONNECTOR Ø400MM / 90°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1892



CURVED CONNECTOR Ø800MM / 45°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1893



CURVED TRACK Ø1600MM / 45°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1894



CURVED Ø1600MM / 90°


AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1895



CURVED TRACK Ø1600MM / 180°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1904



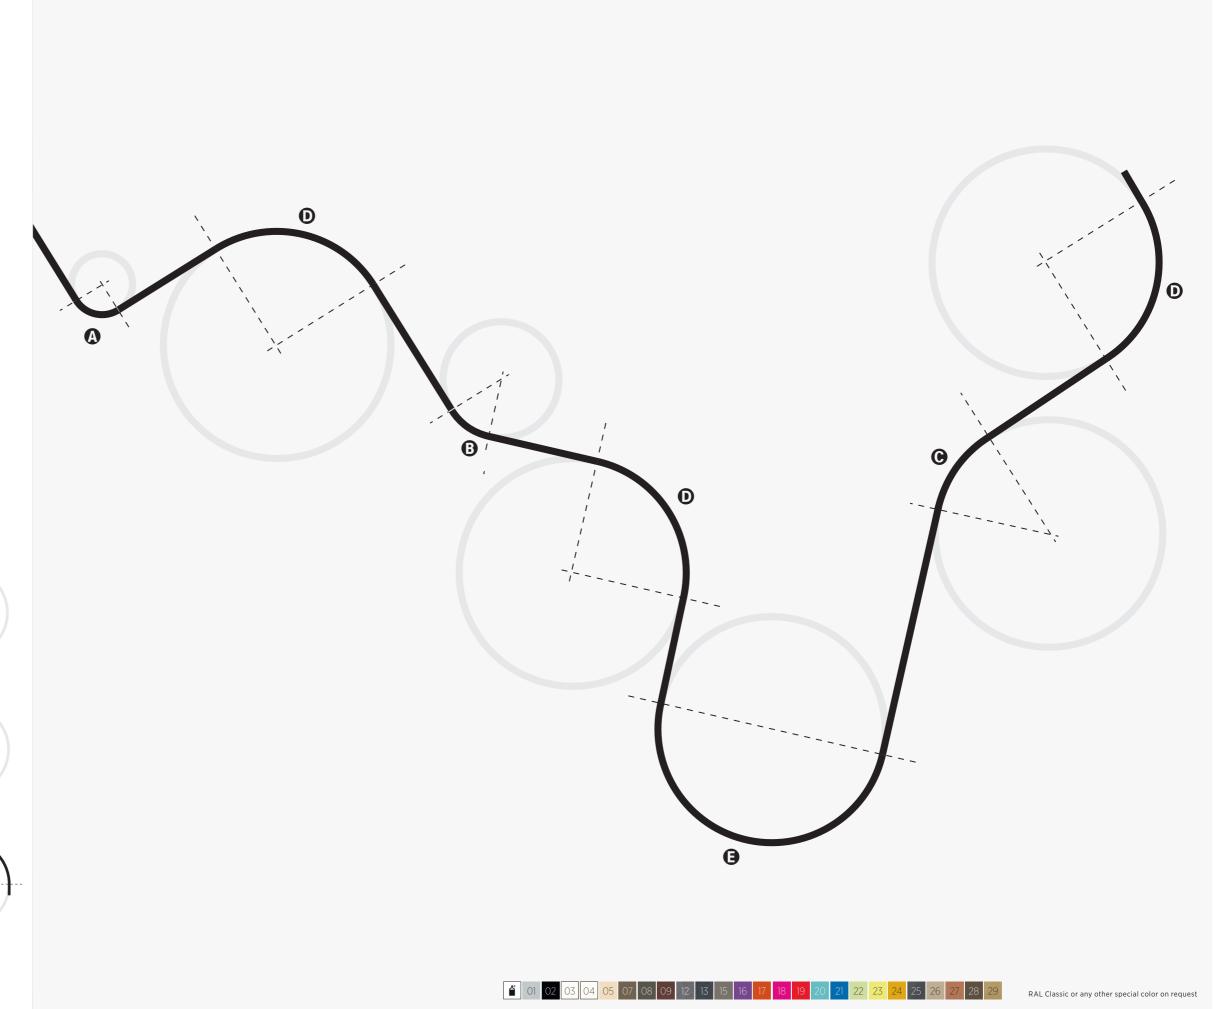






INSERT: SNOOKER SHINE - 02 BLACK VELVET | SHINE RING WHITE

# **INSERTS**



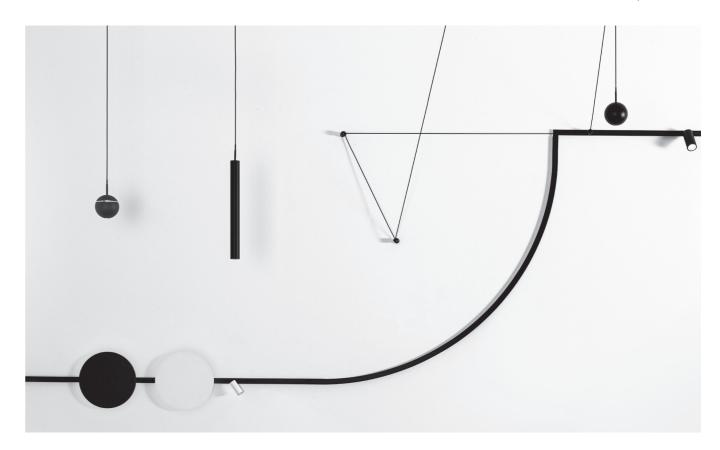



MINIMAL TRACK offers a wide variety of inserts - the selection ranges from pendant luminaires over indirectly illuminated DISQs to decorative elements. The system guarantees exceptional flexibility to adapt the lighting concept to any room situation.

Optional components and colored accessories allow unlimited scope for individualized design concepts. This lighting system is not only suitable for creating the perfect lighting atmosphere, but also adds individuality and exceptionality to any space.

# **INSERTS OVERVIEW**

IMAGINE MICRO 20

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02120-02



IMAGINE MICRO 35

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02121-02



MAGIQ MICRO

COLOR: BLACK ART.-N°: 7-02400-02





AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02232-02

SNOOKER METAL

AVAILABLE IN CHROME FINISH ART.-N°: 7-02409-02



HANGOVER

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02236-02



AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02153-02

DISQ ROUND METAL

AVAILABLE IN 3 FINISHES ART.-N°: 7-02152-02







AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02155-02

DISQ SQUARE METAL

AVAILABLE IN 3 FINISHES ART.-N°: 7-02154-02

















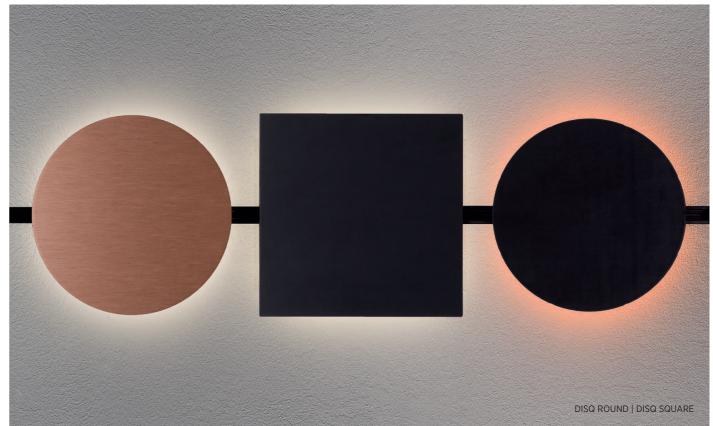



MELT MINI LED





OPAL SMALL

PHOTO | TOM



MINIMAL TRACK, COLOR 02 BLACK | IMAGINE MICRO

#### IMAGINE MICRO

The ultra-compact design makes the sophisticated technology almost invisible, leaving only elegant lines that integrate perfectly into the interior design. The IMAGINE MICRO spotlights are available in 25 PROLICHT colors. Special colors can be ordered on request.






IMAGINE MICRO 20 ART.-Nº 7-02120-02

Ø 23mm L: 72 mm

IMAGINE MICRO 35 ART.-Nº 7-02121-02


Ø 35 mm L: 95 mm

	LUMEN MAX.	
	202 lm	
	WATT	
	3.7 W	
	ССТ	
2700 K	3000 K	4000 K














RAL Classic or any other special color on request

YOUR PERFECT FOCUSING For the perfect definition of your light setting, not only each spot can be tilted from 0° to 90° and rotated 355°, but comes also equipped with a tool-less locking system, to fix in position the desired rotation, even when spots are installed in a vertical track but comes also equipped with a tool-less locking system. The spots can be easily fixed in the desired position, even when they are installed in a vertical track.





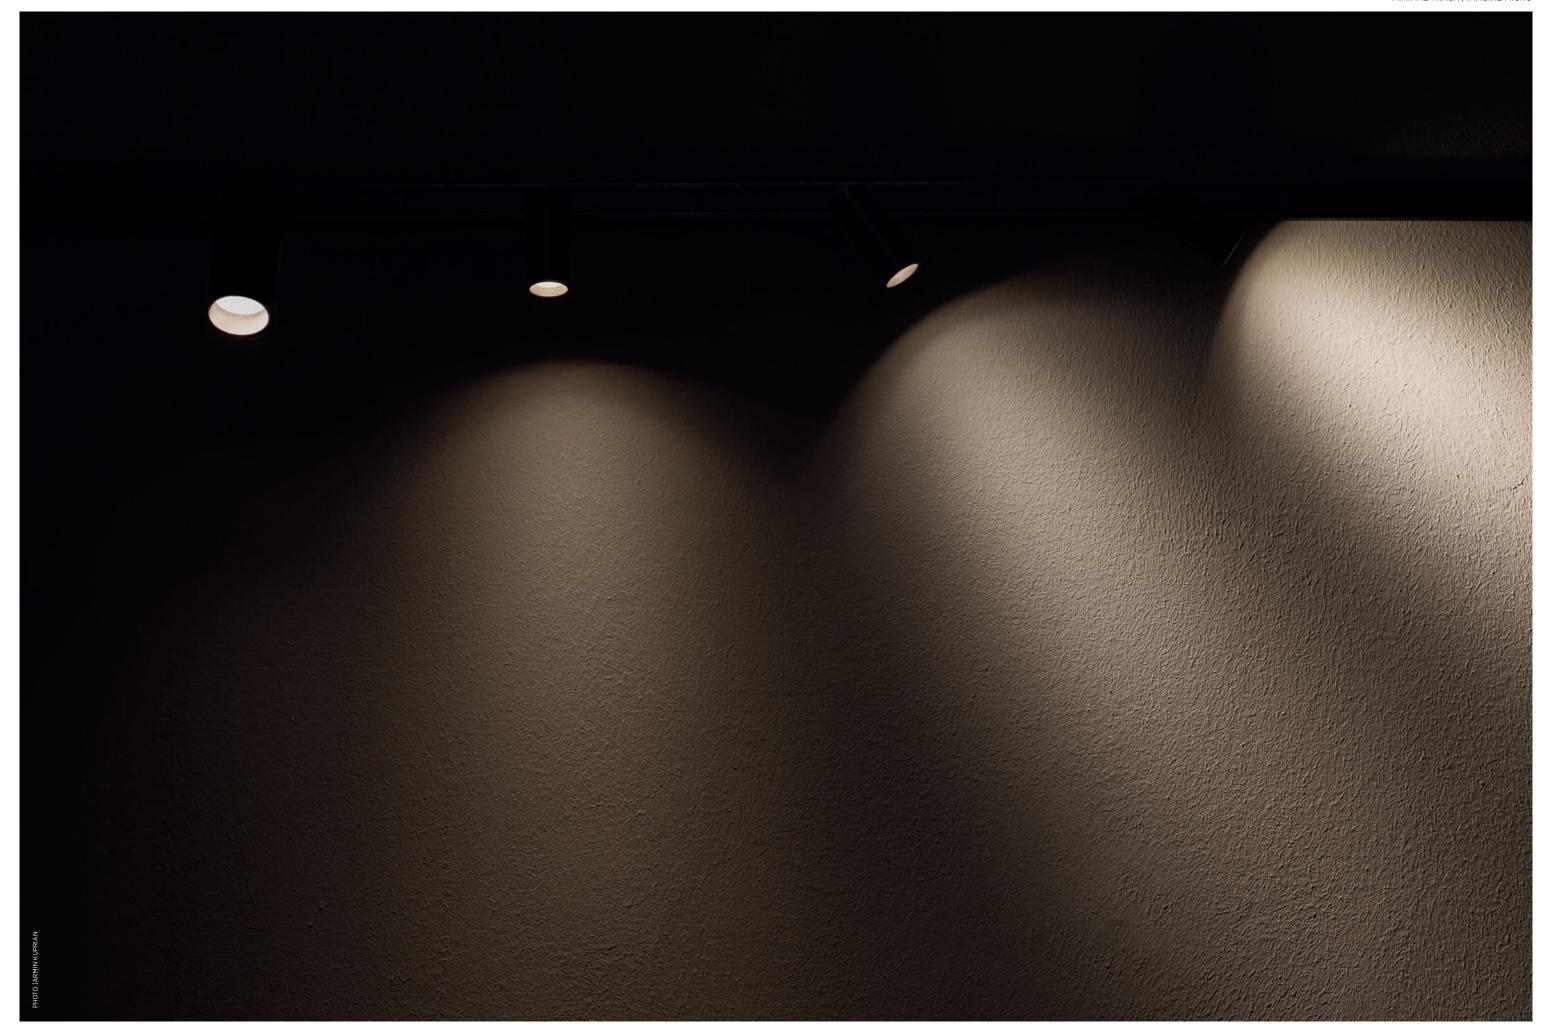



MAGIQ MICRO

The MAGIQ MICRO is part of the MAGIQ family and works with DALI, CASAMBI or PUSH DIM. The inserts can be lined up to fill the whole track with the MAGIQ inserts while the distance of the single dots stays always the same. This leads to a coherent appearance of the system and uniform illumination.



MAGIQ MICRO ART.-Nº 7-02400-02

L: 300mm x 11 H:7 mm


LUME	N MAX.
42	9 lm
W	'ATT
7,	3 W
	сст
2700 K	3000 K




MICROLINE

#### MICROLINE

The specially developed LED Lines can be controlled individually with DALI, CASAMBI and PUSH DIM. The MICROLINE is an essential part of the range of inserts for the MINIMAL TRACK and offers shadowfree LED lines to be integrated into the architecture. Within the track, the lines are seamlessly installed and keep the appearance of the track as minimalistic as intended.

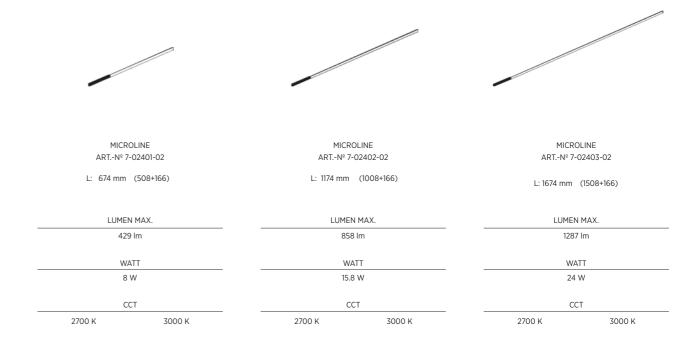


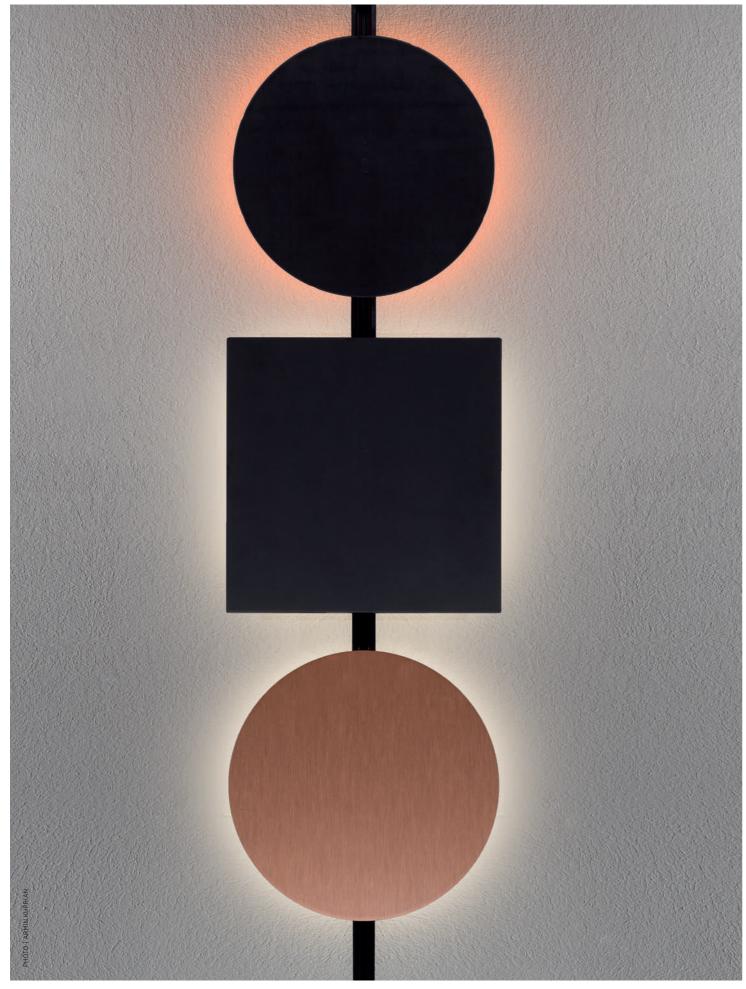

DISQ ROUND COLOR, COLOR 02 BLACK VELVET | DISQ SQUARE, STAINLESS STEEL

DISQ ROUND and DISQ SQUARE are new inserts for the MINIMAL TRACK, offering refined complements to the family. With its discrete 2700K indirect emission and its DALI DIM functionality, DISQ offers maximum lighting comfort.

The inserts are available in two different versions: with a metal plate, which is available in copper, chrome or a stainless steel finish, and a color version, that can be individualized in our 25 PROLICHT colors.

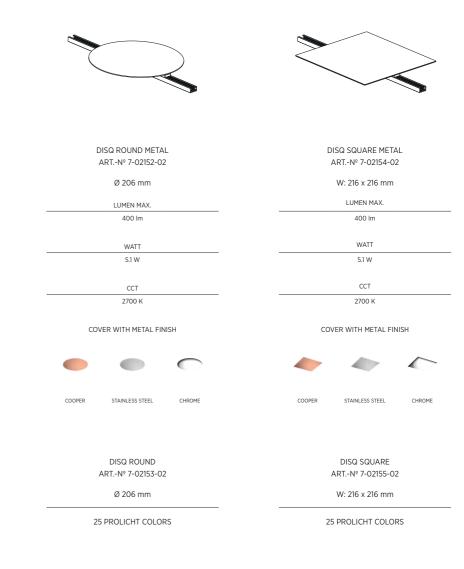

RAL Classic or any other special color on request

CAN HAVE ACCESSORY DISQ ROUND | AURA COVER

YELLOW ORANGE RED BLUE GREEN


CAN HAVE ACCESSORY DISQ SQUARE | AURA COVER

YELLOW ORANGE RED BLUE GREEN

The DISQ ROUND | SQUARE inserts can also be equipped with the AURA COVER accessories: softening the light, highlighting the shape and creating a floating colored effect.



MINIMAL TRACK, COLOR 02 BLACK VELEVET | DISQ ROUND, COPPER | AURA COVER: YELLOW

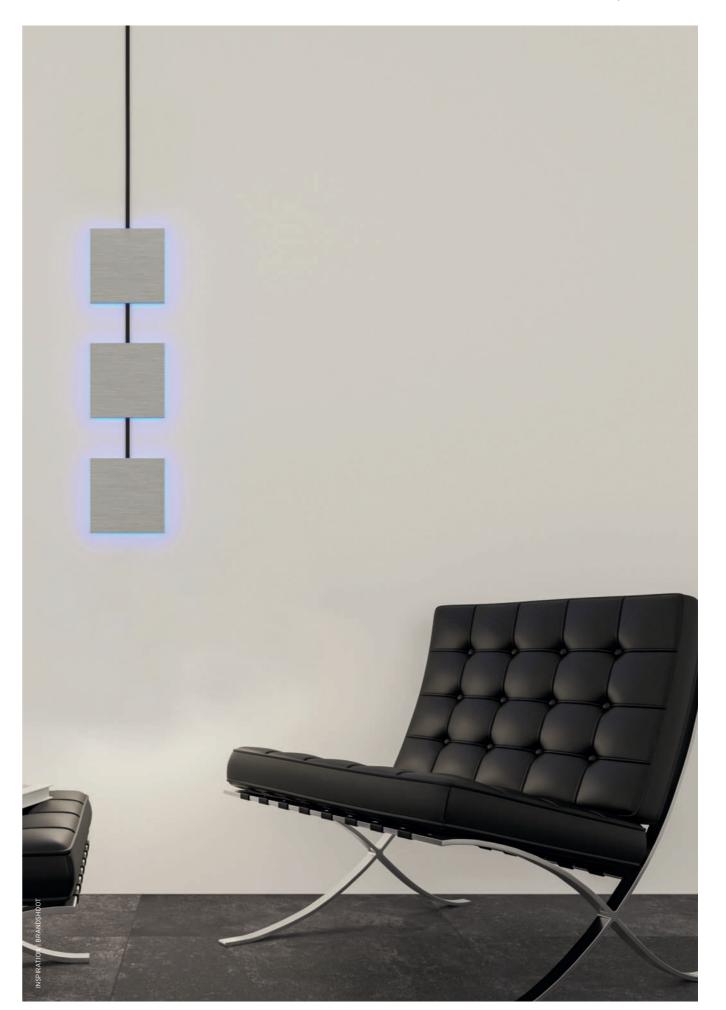

MINIMAL TRACK, COLOR BLACK VELVET | DISQ SQUARE, STAINLESS STEAL | AURA COVER: BLUE






SNOOKER, COLOR 25 GUN METAL, SHINE RING WHITE | SNOOKER, COLOR 25 GUN METAL & COLOR 08 IN THE ARMY

SNOOKER The iconic spherical luminaire SNOOKER is a real eye-catcher on its own or grouped in multiples as a light installation. Configurable in the PROLICHT colors, with an additional KORONA SHINE RING and with adjustable cable lengths, SNOOKER offers plenty of design freedom. The unique MICRO DOT lens provides pure light with optimum glare control.

The integrated lens optics allow beam angles of 32° and 58° while offering a maximum effect with a minimal light emission opening.



SNOOKER ART.-Nº 7-02409-02

Ø 72 mn

	LUMEN MAX.	
	352 lm	
	WATT	
	6.5 W	
	CCT	
2700 K	3000 K	4000 K

BEAMWIDTH



25 PROLICHT COLORS

#### CAN HAVE ACCESSORY | SHINE RING



4 05 07 08 09 12 13 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 RAL Classic or any other special color on request



SNOOKER METAL CHROME | SHINE RING WHITE

SNOOKER METAL The new chrome finish of our iconic SNOOKER luminaire provides for a high class feel in every space. Its reflective surface leads to new possibilities to combine elements of the MINIMAL TRACK family and brings highly creative lighting ideas to life.



SNOOKER METAL ART.-Nº 7-02409-02 SNOOKER METAL SHINE ART.-Nº 7-02420-02

	LUMEN MAX.	
	352 lm	
	WATT	
	6.5 W	
	CCT	
2700 K	3000 K	4000 K







VERY WIDE FLOOD

SNOOKER METAL



CAN HAVE ACCESSORY | SHINE RING





















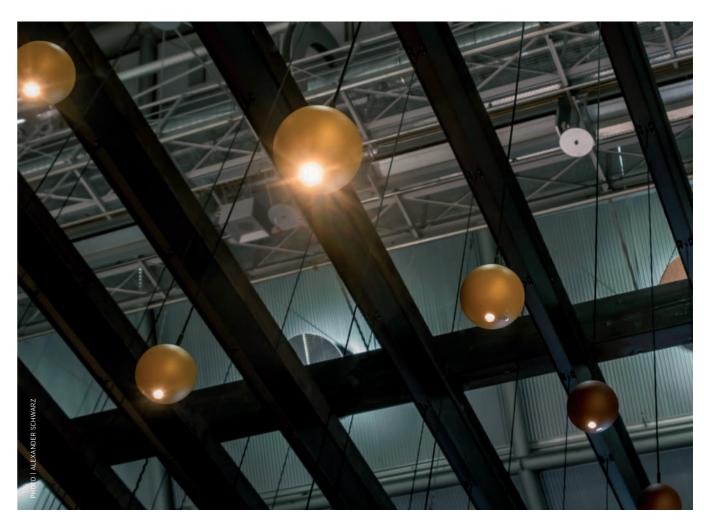

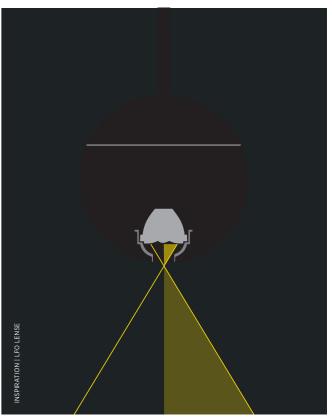




RAL Classic or any other special color on request



HANGOVER SHINE, COLOR 25 GUN METAL, SHINE RING WHITE | HANGOVER KORONA, COLOR 27 COPPER MINE

The HANGOVER PLUG suspended spot together with the PLUG EXSTENSIONS allows a manual adjustment of the wire suspension: the spotlights are available with a rope length of 2 or 4 metres and can be manually shortened or lengthened by rolling into the canopy.

An ingenious docking system guarantees quick replacement and quick locking of the various HANGOVER PLUG modules: this way, the lights can be exchanged at will, giving room for a new look over and over again. The docking system is also available for other product families and guarantees that other luminaires can also be easily mounted (SNOOKER | MELT and OPAL by Tom Dixon)

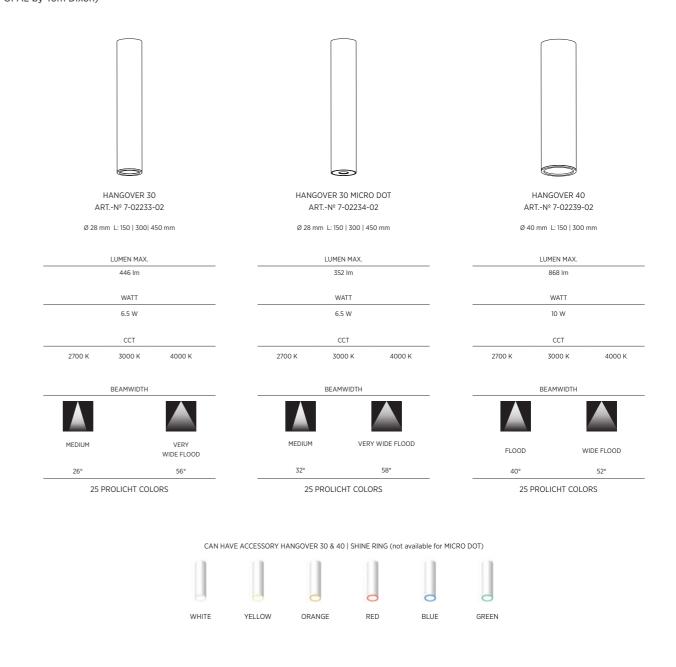



HANGOVER | COLOR 02 BLACK VELVET | CORONA CONE 02 BLACK VELVET







KORONA CONE The deep reflector directs the light effectively past the cone without changing the light color. The cone can differ colors. KORONA SHINE creates be customized in any of the 25 PRO-LICHT colors.


SHINE RING The luminaire can also be equipped with a luminous ring in one of 6 colorful accents and atmospheric highlights.

MICRO DOT The integrated lens optics allow beam angles between 24° and 58°.


The available variants with MICRO DOT technology offer maximum effects.

JUST LIGHT - NO GLARE



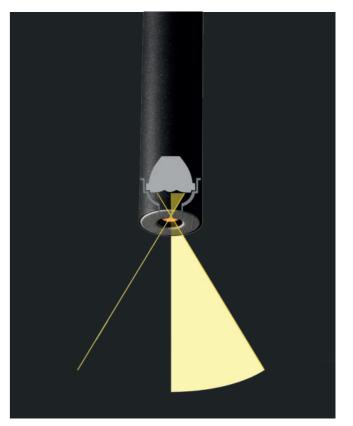



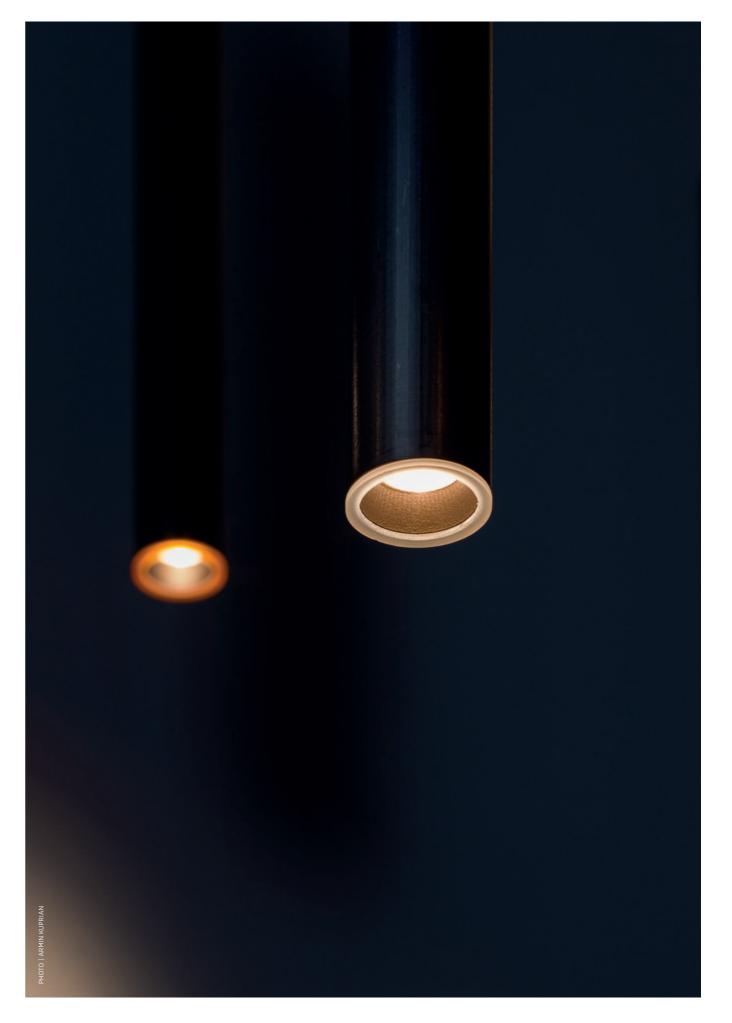



HANGOVER | COLOR 25 GUN METAL | CORONA CONE COLOR 19 KISSING APHRODITE





MELT MINI is a beautifully distorted small pendant in a modern metal finish. Featuring an intergrated LED module, this luminaire creates a mesmerizing melting hot-blown glass effect when on and a mirror-finish effect when off. The luminaire is produced, using a sophisticated manufacturing technique to achieve the perfect melted orb.



MELT MINI ART.-Nº TD-414-0012XX

DIMENSION
Ø 280 mm
LUMEN MAX.
234 lm
WATT
8 W
сст
3000 K



ALGGEN ALGEBRA







OPAL SMALL is a small translucent pendant light. Produced with a high tech manufacturing technique and designed using a recipe of opalescent polycarbonate, which results in a satisfyingly ethereal orb. Coupled with the new Tom Dixon LED, the shatter proof OPAL pendant emits soft, diffused and flattering light.



OPAL LED ART.-Nº TD-414-0032OP

DIMENSION
Ø 250 mm
LUMEN MAX
506 lm
WATT
8 W
ССТ
3000 K

TOM DIXON × PROLICHT



# ACCESSORIES FOR PENDANT INSERTS





With the optional cable loop components and the various cable roller sizes, an adaptation in length is possible at any time in the simplest way. Individualization in the 25 PROLICHT colors is possible so that the components fit perfectly into the existing room concept.



With the plug connector, SNOOKER and HANGOVER PLUG luminaires can be easily exchanged at any time.









Various cable loops can be used to create patterns that can be placed anywhere in the room and expanded across ceilings and walls. By offering this creative freedom to the designer, cables of pendant lights can be turned into additional design elements. The MINIMAL TRACK system offers you unprecedented freedom to fulfill your wishes/requirements from a functional and a creative perspective.

The main goal of this system is to bring illumination to the places where it is needed - this means that the MINIMAL TRACK liberates the designer from thinking about where the power outlet is and enables a highly individualistic design vision.







SNOOKER, COLOR 02 BLACK VELVET | OPAL SMALL | HANGOVER, COLOR 25 GUN METAL



MELT MINI CHROME

Minimalistic design, minimal installation effort, tailor-made result in the most simple way - that's the MINIMAL TRACK system. Now it can be equipped with our well-known SNOOKER and HANGOVER inserts to give you even more possibilities to enrich your design concept.

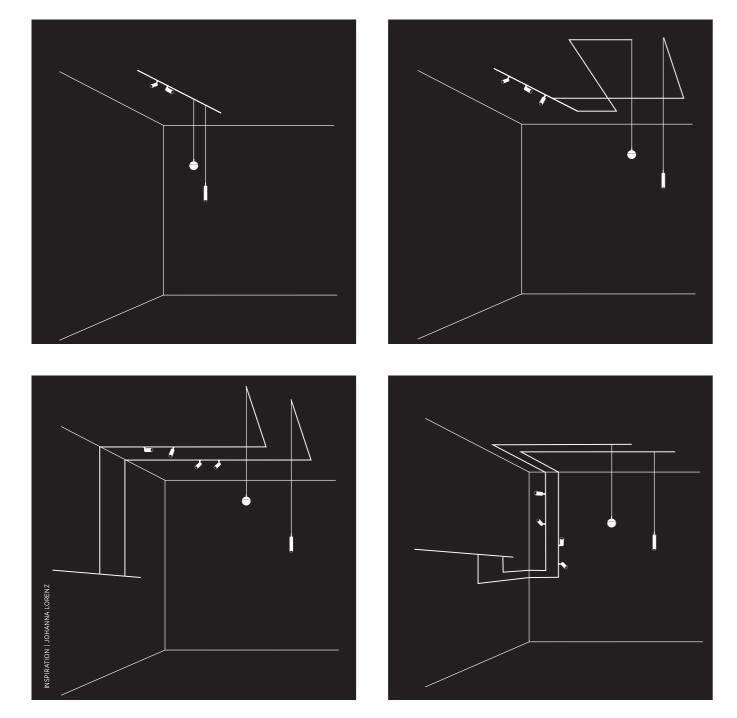


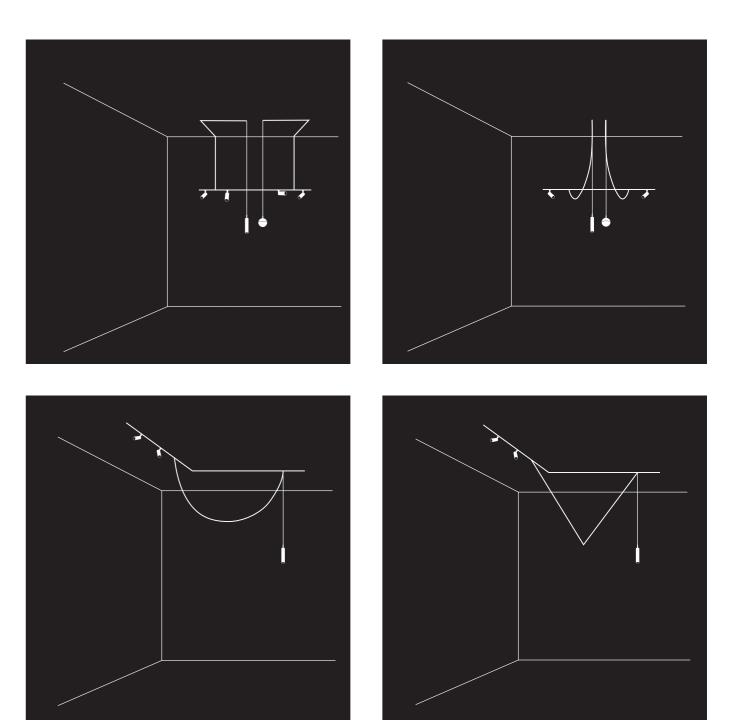






#### **EXACTLY THE LIGHT YOU WANT**

Every moment, every day and every situation is different. Up to 64 inserts for the MINIMAL TRACK can be dimmed individually, in groups or together with DALI and CASAMBI. This enables complete control of your lighting atmosphere.

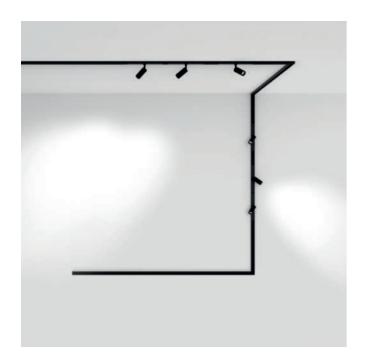




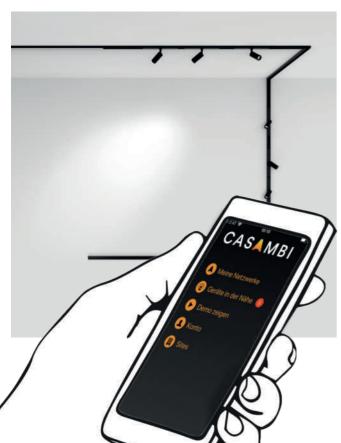

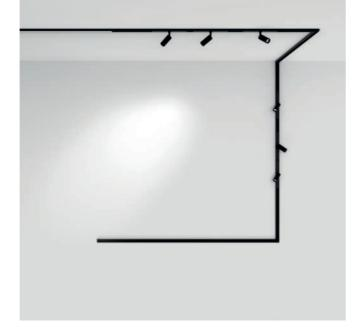

Despite its exceptionally compact size, the MINIMAL TRACK is designed as a DALI track that can be integrated into any lighting control system. It has two conductors dedicated to DALI in order to enable completely individual control of each installed luminaire.

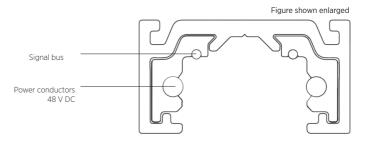

#### 64 ADDRESSES

DALI offers individual control of each single luminaire, with the possibility of managing groups and scenarios.



#### 8 ADDRESSES

The CASAMBI control allows wireless regulation of up to eight groups of fittings, through physical commands or a mobile App.



#### 1 ADDRESS


The PUSH DIM solution offers simple control of all the fittings in the same line that can be easily dimmed with a standard pushbutton.




#### 1 ADDRESS


Simply ON / OFF without any control



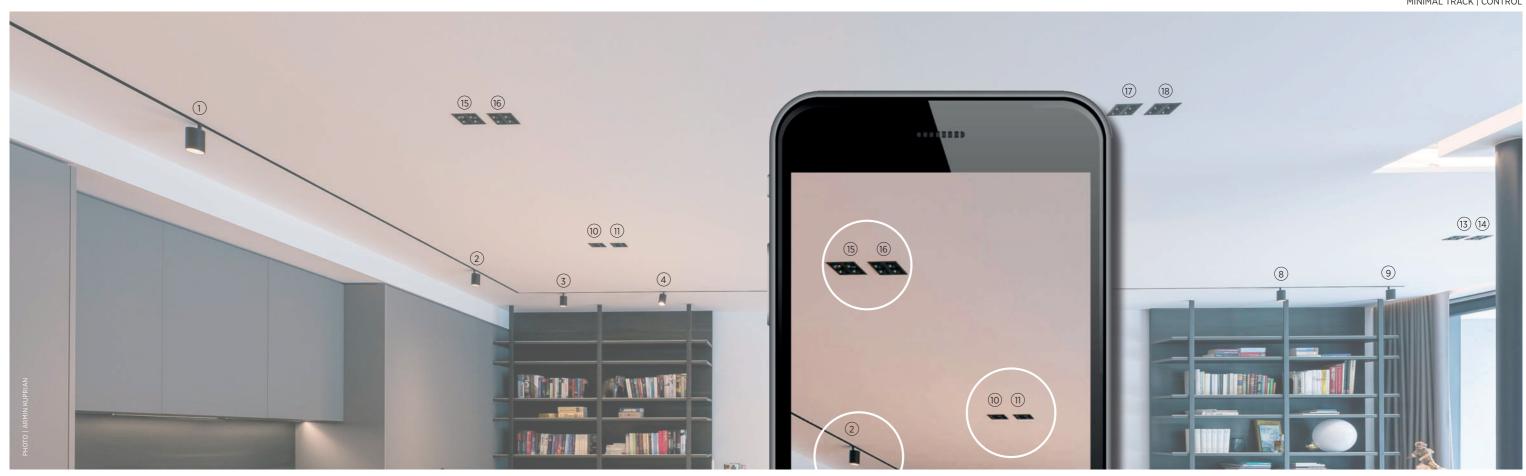

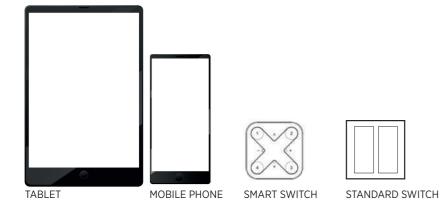

CONNECTION EXAMPLE

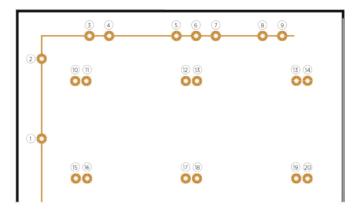

#### EXACTLY THE CONTROL YOU NEED

#### PUSH DIM | 1 ADRESS


All of the inserts are dimmed in parallel and the last scene is stored.

#### CASAMBI | 8 ADRESSES

Up to eight individual spots or groups and scenes can be controlled with CASAMBI.

#### DALI 2 | 64 ADRESSES

With DALI, 64 inserts can be individually programmed and saved scenes are available to be fetched from the storage. With this control, every room can be individually programmed or integrated into a holistic DALI solution for the whole object. In addition, a smaller housing of the control can be integrated into switch boxes to save space.

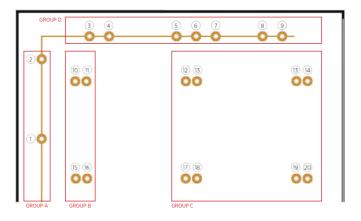

#### WWW.PROLICHT.AT

# CONFIGURATION MAKES A DIFFERENCE

 00
 01
 02
 03
 04
 05

 07
 08
 09
 12
 13

 15
 16
 17
 18
 19

 20
 21
 22
 23
 24

 25
 26
 27
 28
 29

RAL Classic or any other special color on request

Luminaires can play an important role in your room design, which means that you need to have unlimited configurability. And that's what we at PROLICHT can give you. With all our lighting solutions.

Try it out and see for yourself what it means to create your own, tailor-made product from millions of possible combinations - with the help of our unique 3D configurator.

## MAKE IT YOURS!

CONFIGURE ONLINE: PROLICHT.AT/MINIMALTRACK



MELLOW YELLOW

# COLOR MAKES A DIFFERENCE








28



## MINIMAL TRACK

#### ☐ BEAMWIDTH | LEGEND

Super Spot	SS	0° - 10°
Spot	S	10° - 25'
Medium	М	25° - 35
Flood	F	35° - 45
Wide Flood	WF	45° - 55
Very Wide Flood	VWF	55° - 65

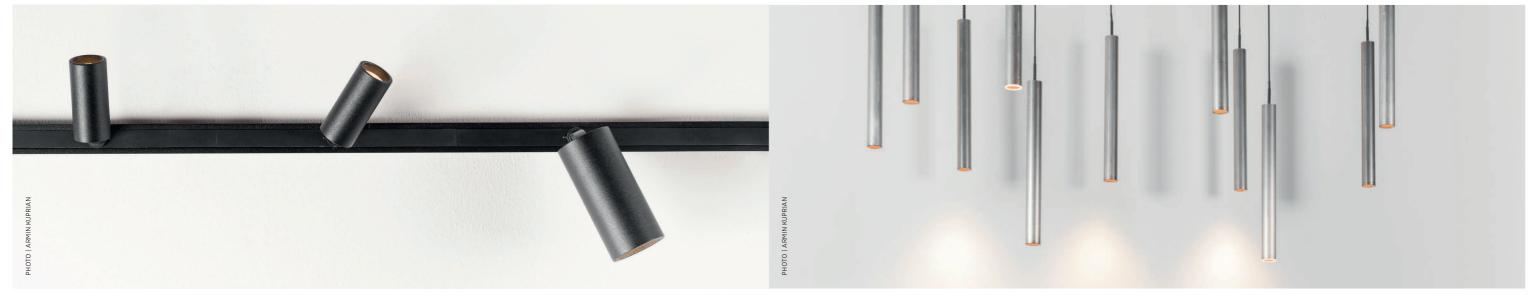

IMAGINE MICRO 20 IMAGINE MICRO



COLOR TEMPERATURE CCT

2700 K 3000 K 4000 K

BEAMWIDTH

SPOT 18° up to MEDIUM 26°







#### **IMAGINE MICRO**

DESCRIPTION	DIMENSION   mm		CCT		LUMEN MAX.	WATT	CRI	ARTN°
IMAGINE MICRO 20	Ø 23 H: 50	2700	3000	4000	236	3.7	90	7-02120-02
IMAGINE MICRO 35	Ø 35 H: 76	2700	3000	4000	669	8.6	90	7-02121-02

# CAN-HAVE ACCESSORY: SHINE RING WHITE YELLOW ORANGE RED BLUE GREEN COLOR TEMPERATURE CCT 2700 K 3000 K 4000 K BEAMWIDTH SPOT 26° up to VERY WIDE FLOOD 58°





#### **HANGOVER**

DESCRIPTION		DIMENSI	ON   mm			CCT		LUMEN MAX.	WATT	CRI	ARTN° L150	ARTN° L300	ARTN° L450
HANGOVER PLUG	Ø 28 x	L: 150	L: 300	L: 450	2700	3000	4000	446	6.5	90	7-02233-02	7-02235-02	7-02237-02
HANGOVER PLUG	Ø 40 x	L: 150	L: 300		2700	3000	4000	868	9.8	90	7-02239-02	7-02240-02	•
HANGOVER PLUG MICR	0 Ø 28 x	L: 150	L: 300	L: 450	2700	3000	4000	352	6.5	90	7-02234-02	7-02236-02	7-02238-02





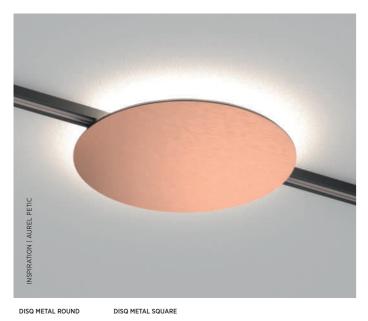

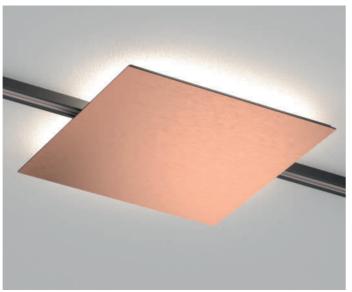

















#### COLOR TEMPERATURE CCT

2700 K



INDIRECT



#### DISQ METAL ROUND & SQUARE





#### **DISQ METAL ROUND & SQUARE**

DESCRIPTION	DIMENSION   mm		CCT		LUMEN MAX.	WATT	CRI	ARTN°
DISQ ROUND METAL	Ø 206	2700	•	•	400	5.1	90	7-02152-02
DISQ SQUARE METAL	216 x 216	2700			400	5.1	90	7-02154-02







DISQ ROUND

















#### COLOR TEMPERATURE CCT

2700 K



#### BEAMWIDTH

INDIRECT



#### DISQ ROUND & SQUARE (POWDER COATED)

25 PROLICHT COLORS



#### **DISQ ROUND & SQUARE**

DESCRIPTION	DIMENSION   mm		CCT		LUMEN MAX.	WATT	CRI	A	RTN°
DISQ METAL ROUND	Ø 206	2700	•	•	400	5.1	90	7-02	2153-02
DISQ METAL SQUARE	216 x 216	2700	•	•	400	5.1	90	7-02	2155-02







SNOOKER

CAN-HAVE ACCESSORY: SHINE RING WHITE YELLOW ORANGE RED BLUE GREEN

SNOOKER SHINE

COLOR TEMPERATURE CCT

3000 K 4000 K

BEAMWIDTH

MEDIUM 32° up to VERY WIDE FLOOD 58°





#### SNOOKER

25 PROLICHT COLORS

#### **SNOOKER**

DESCRIPTION	DIMENSION   mm		CCT	L	UMEN MAX.	WATT	CRI	ARTN°
SNOOKER	Ø 72	2700	3500	4000	352	6.5	90	7-02232-02





#### CAN-HAVE ACCESSORY: SHINE RING

WHITE	YELLOW	ORANGE	RED	BLUE	GREEN
9	9	9	9	9	9

#### COLOR TEMPERATURE CCT

2700 K	3000 K	4000 K

#### BEAMWIDTH

MEDIUM 32° up to VERY WIDE FLOOD 58°





#### SNOOKER METAL




#### SNOOKER METAL (CHROME)

DESCRIPTION	DIMENSION   mm	CCT	LUMEN MAX.	WATT	CRI	ARTN°
SNOOKER METAL	Ø 72	2700 3500	4000 352	6.5	90	7-02409-02





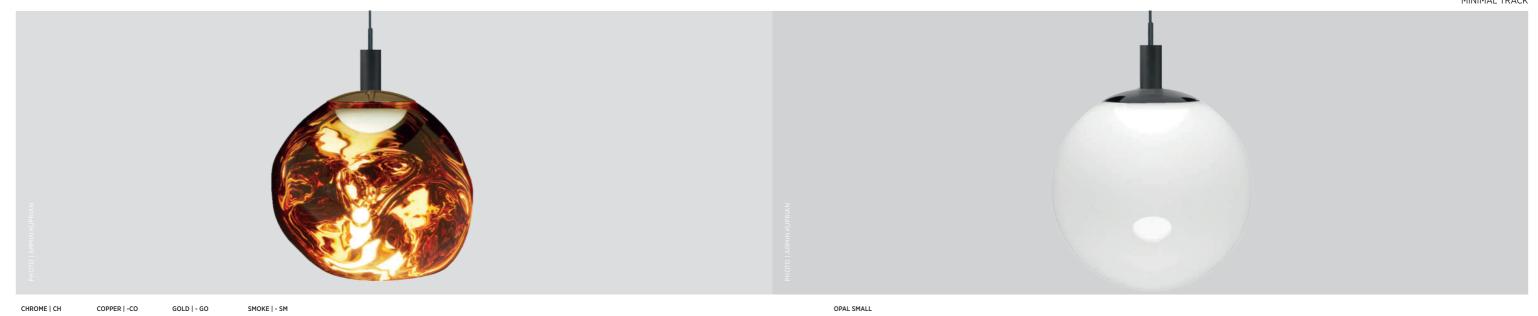



COLOR TEMPERATURE CCT

BEAMWIDT

DIRECT



#### **MELT MINI**

DESCRIPTION		ССТ	LUMEN MAX.	WATT	CRI	ARTN° 2-4 m	ARTN° 10 m	ARTN° 1.1 m
MELT MINI CHROME	Ø 280 mm	3000	220	7	80	TD-414-0012CH	TD-414-0012CH-10M	TD-414-0012CH-1M
MELT MINI COPPER	Ø 280 mm	3000	220	7	80	TD-414-0012CO	TD-414-0012CO-10M	TD-414-0012CO-1M
MELT MINI GOLD	Ø 280 mm	3000	220	7	80	TD-414-0012GO	TD-414-0012GO-10M	TD-414-0012GO-1M
MELT MINI SMOKE	Ø 280 mm	3000	220	7	80	TD-414-0012SM	TD-414-0012SM-10M	TD-414-0012SM-1M



COLOR TEMPERATURE CCT

3000 K

BEAMWIDTH

DIRECT




#### OPAL SMALL

DESCRIPTION		CCT	LUMEN MAX.	WATT	CRI	ARTN° 2-4 m	ARTN° 10 m	ARTN° 1.1 m
OPAL SMALL	Ø 250 mm	3000	220	7	80	TD-414-00320P	TD-414-00320P-10M	TD-414-0032OP-1M





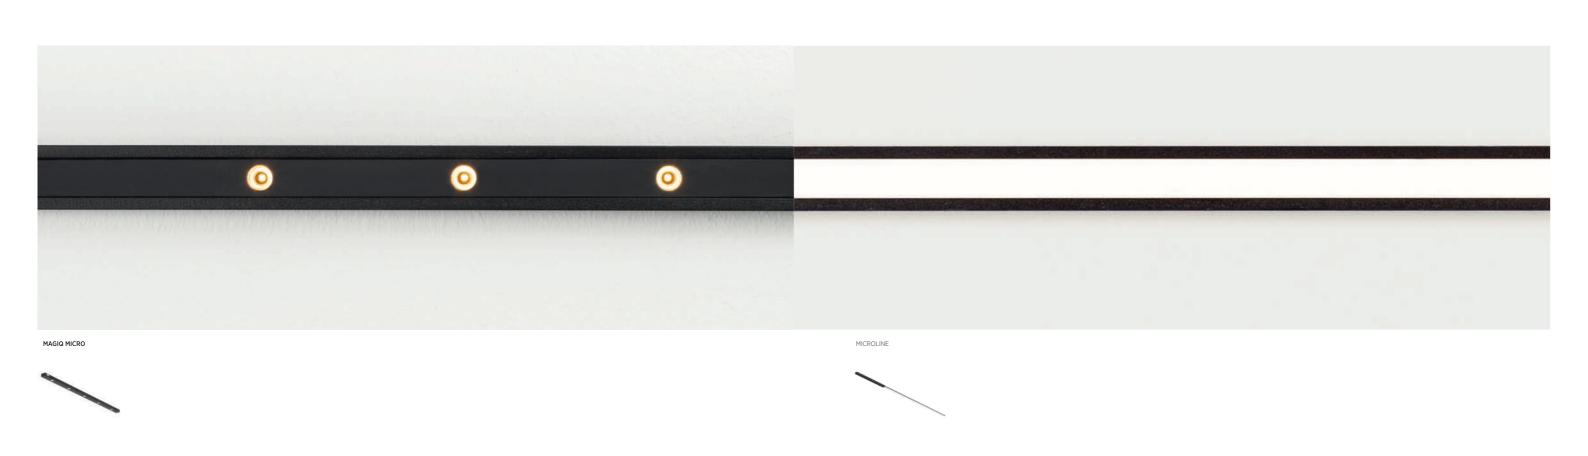

COLOR TEMPERATURE CCT

2700 K 3000 K

BEAMWIDTH

DIDECT



WIDE FLOOD 54



700 K 3000 K

DIFFU



#### MAGIQ MICRO

DESCRIPTION	DIMENSION   mm		CCT		LUMEN MAX.	WATT	CRI	ARTN°
MAGIQ MICRO	L: 300	2700	3000	•	365	5.5	90	7-02400-02

#### **MICROLINE**

DESCRIPTION	DIMENSI	ON   mm		CCT		LUMEN MAX./M	WATT/M	CRI	ARTN°
MICROLINE	L: 674	(508+166)	2700	3000	•	386	8	90	7-02401-02
	L: 1174	(1008+166)	2700	3000	•	772	15.8	90	7-02402-02
	L: 1674	(1508+166)	2700	3000	•	1158	24	90	7-02403-02






#### **COMPONENTS**

	ENIS		
ARTICLE	TRACK   POWDER COATED   1000 mm	COLOR 1-29	ARTN° <b>350-1885</b>
	TRACK   POWDER COATED   2000 mm	1-29	350-1886
	TRACK   POWDER COATED   3000 mm	1-29	350-1887
	TRACKMASK 5 m	BLACK	350-1896
16	MOUNTING SCREWS   Set 50 pieces		800-1427
2	X-CONNECTOR	1-29	350-1994
>	T-CONNECTOR	1-29	350-1995
	LINEAR CONNECTOR	BLACK	350-1868
>	FLAT CORNER CONNECTOR	BLACK	350-1869
1	DIHEDRAL CONNECTOR	BLACK	350-1870
	FLEXIBLE CONNECTOR	BLACK	350-1871



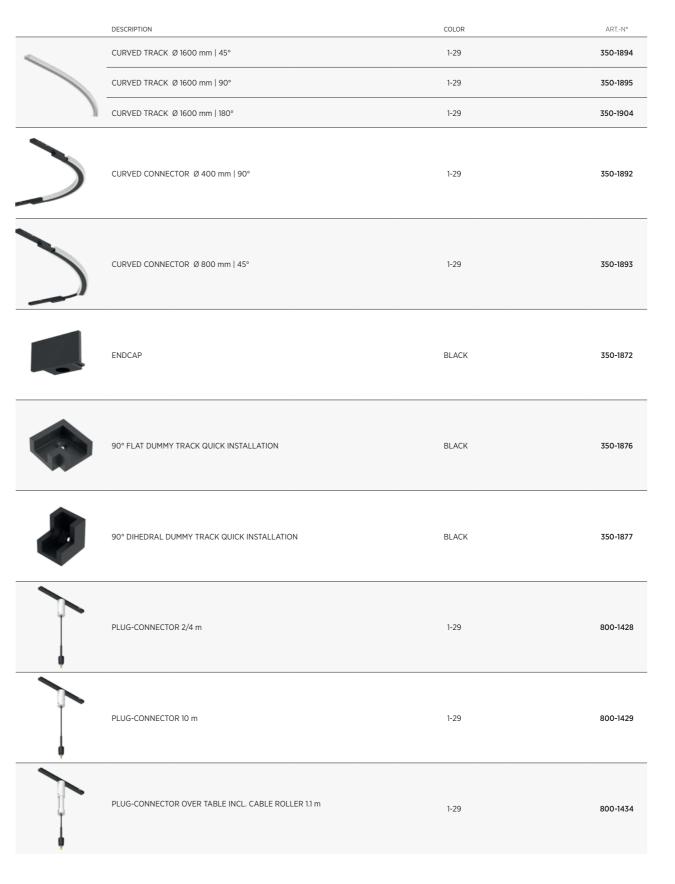



ARTICLE	DESCRIPTION	WATT	COLOR	ARTN°
	WALL/CEILING CABLE LOOP		1-29	350-2060
	WALL/CEILING CABLE ROLLER		1-29	350-2061
3	TRACK CABLE LOOP		1-29	350-2062
3 0	TRACK CABLE ROLLER		1-29	350-2063
	SUSPENDED ROLLER		1-29	350-2064
	FEED UNIT END + 2.5 m SUPPLY CABLE		BLACK	350-1866
	FEED UNIT CENTRAL + 2.5 m SUPPLY CABLE		BLACK	350-1867
	DRIVER BOX ENDINSTALLATION ON / OFF 240 x 75 x 35 mm	96	1-29	350-1873
	DRIVER BOX ENDINSTALLATION DALI 240 x 120 x 35 mm	86	1-29	350-1996
	DRIVER BOX ENDINSTALLATION PUSH DIM 240 x 120 x 35 mm	92	1-29	350-1898
	DRIVER BOX ENDINSTALLATION CASAMBI 240 x 120 x 35 mm	86	1-29	350-1899
	DRIVER BOX CENTRAL INSTALLATION ON / OFF 240 x 75 x 35 mm	96	1-29	350-1874

ARTICLE	DESCRIPTION	WATT	COLOR	ARTN°
	DRIVER BOX CENTRAL INSTALLATION DALI 240 x 120 x 35 mm	86	1-29	350-1997
	DRIVER BOX CENTRAL INSTALLATION PUSH DIM 240 x 120 x 35 mm	92	1-29	350-1900
	DRIVER BOX CENTRAL INSTALLATION CASAMBI 240 x 120 x 35 mm	86	1-29	350-1901
	POWER SUPPLY 48 V	90		350-1875
	REMOTE SET PUSH DIM	92		350-1905
	REMOTE SET CASAMBI	86		350-1906
1	REMOTE SET DALI	86		350-1998
	POWER SUPPLY 48 V	320		350-2065
	REMOTE SET PUSH DIM	315		350-2066
	REMOTE SET CASAMBI	310		350-2067
	REMOTE SET DALI	310		350-2068







Based on the MINIMAL TRACK system, as result of PROLICHT cooperation with Tom Dixon we designed CODE: a product that merges technological expertise with a unique design vision, an innovation that could only be created together.

DISCOVER MORE ON

www.prolicht.at/code



